


Part Number: 7784E

VIDEO TRIAX 11 PVC

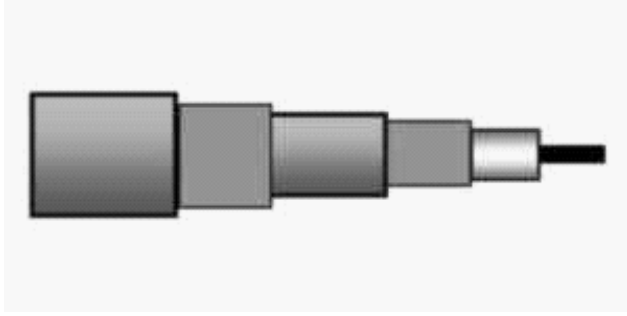

## Product Description

VIDEO TRIAX 11 PVC

## Product Specifications

## Technical Specifications

Application 1:	Triaxial camera cable
----------------	-----------------------

## Construction and Dimensions

### Conductor:

AWG	Stranding	Material	Nominal Diameter
15	Solid	Bare copper	1.4 in

### Insulation:

Type	Material	Nominal Diameter	Diameter +/- Tolerance
Dielectric	Foamed Polyethylene	6.5 mm	0.2 mm

### Outershield 1:

Type	Material	Nominal Diameter	Min. Coverage [%]
Braid	Bare copper	7.2 mm	80 %

### Outerjacket 1:

Material	Nominal Diameter	Diameter +/- Tolerance
FRNC/LSNH	8.5 mm	0.2 mm

### Outershield 2:

Type	Material	Nominal Diameter	Min. Coverage
Braid	Bare copper	9.1 mm	80 %

## Outerjacket 2:

Material	Nominal Diameter	Diameter +/- Tolerance
PVC	11 mm	0.2 mm

## Electrical Characteristics

---

### Conductor DCR:

Max. Conductor DCR	Nominal Inner Shield DCR	Nominal Outer Shield DCR
11.2 Ohm/km	6.5 Ohm/km	7 Ohm/km

### Capacitance:

Nom. Capacitance Conductor to Shield
55 pF/m

### Impedance:

Nominal Characteristic Impedance
75 Ohm

### High Frequency (Nominal/Typical):

Frequency [MHz]	Nom. Insertion Loss
1 MHz	0.5 db/100m
3.58 MHz	1 db/100m
5 MHz	1.2 db/100m
7 MHz	1.3 db/100m
10 MHz	1.6 db/100m
67.5	4.1 db/100m
71.5	4.3 db/100m
88.5	4.8 db/100m
100	5.2 db/100m
135	6 db/100m
143	6.2 db/100m
180	7.1 db/100m
270	8.7 db/100m
300	9 db/100ft
360 MHz	10.2 db/100ft
540	12.8 db/100ft
720	15 db/100ft
750	15.4 db/100ft
1000	18.2 db/100ft
1500	23 db/100ft
2000	27.4 db/100ft
2250	29.4 db/100ft
3000	35.1 db/100ft

#### Delay:

Nominal Delay	Nominal Velocity of Propagation (VP) [%]
410 ns/ft	81 %

#### High Freq:

Frequency [MHz]	Min. SRL (Structural Return Loss)
5 - 850 MHz	23 dB

#### Inductance:

Nominal Inductance
0.4 $\mu$ H/m

#### Voltage:

Element	Voltage Rating [V]
	400 rms V
Maximum operating	

## Screening:

Frequency [MHz]	Min. Screening Attenuation
30 - 850 MHz	75

## Use

Max Recommended Pulling Tension:	300 N
----------------------------------	-------

## Safety

## Temperature Range

Installation Temp Range:	-5 to +70 °C
Operating Temp Range:	-40 to +70 °C
Storage Temp Range:	-40 to +70 °C

## Mechanical Characteristics

Min Bend Radius (W/o Pulling Strength):	110 mm
---	--------

## Part Number

## Standards

## History

Revision Date:	2014-03-10
Revision Number:	2

## Product Variants

Part Number	Color	Put-Up Type	Length
7784E.00305	RED, RAL3000	Reel	
7784E.00500	RED, RAL3000	Reel	
7784E.00600	RED, RAL3000	Reel	
7784E.009999	RED, RAL 3000	Reel	499 m
7784E.011000	RED, RAL 3000	Reel	1000 m
7784E.01500	RED, RAL 3000	Reel	500 m
7784E.019999	RED, RAL 3000	Reel	475 m
7784E.02500	ORANGE	Reel	500 m

All Rights Reserved

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with EU RoHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this Product Disclosure is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

Belden declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC.