


NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 16/6 SEOW 105°C (-50°C)	DWG NO: 1606E003
SCALE: 10x	DATE: 7/25/05
CUSTOMER: INDUSTRIAL ELECTRIC	DR. BY: DP LANGER
	NWI NO: FSE166-002
	CUSTOMER P/N: T.B.D.

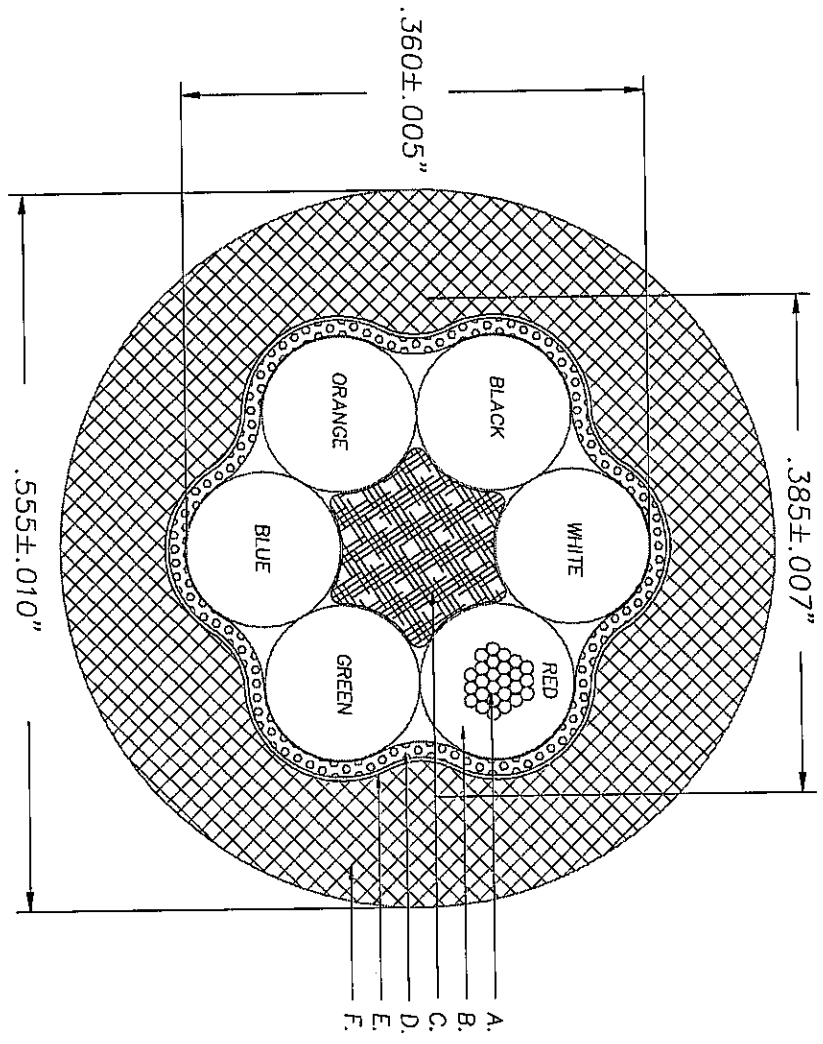

ITEM	SPECS.
A.	16 GAUGE 26x30BC BUNCHED O.D. .059±.003"
B.	30 MILS TPE INSULATION 105°C 600V 27 MILS MIN. TPE INSULATION O.D. .120±.002"
C.	POLY FILLER
D.	80% MIN. TC BRAID SHIELD 34 GAUGE SINGLE ENDS
E.	TISSUE PAPER SEPARATOR
F.	80 MILS PRESSURED TPE JACKET 105°C 600V 64 MILS MIN. TPE JACKET BLACK JACKET UL AND CSA APPROVED

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INDENT PRINT:
ATI 3002-1606 (UL) 16/6 SEOW 105°C (-50°C) ES3042 CSA STOW TPW 105°C FT2 LL30875 SHIELDED

INITIAL RELEASE	REVISION RECORD	A	7/25/05	DPL	APPROVAL	APPROVAL
		REV	REV DATE	APPROVAL		