



“Stay Connected” with



HEYware

a PennEngineering® Company

## Heyco® Nylon PCB Supports - Metric Reverse Locking

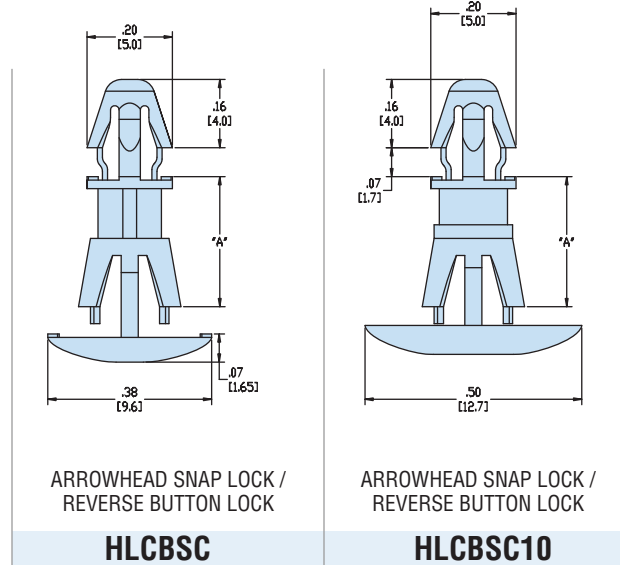

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.062	1,6	.157	4,0
<b>Chassis</b>	.062	1,6	.212	5,4	.062	1,6	.212	5,4

<b>A</b> mm.	<b>PART NO.</b> Natural	<b>DESCRIPTION</b>	<b>PART NO.</b> Natural	<b>DESCRIPTION</b>
6,0	<b>10433</b>	HLCBSC-06M		
8,0	<b>10434</b>	HLCBSC-08M	<b>10439</b>	HLCBSC10-08M
10,0	<b>10435</b>	HLCBSC-10M	<b>10440</b>	HLCBSC10-10M
12,0	<b>10436</b>	HLCBSC-12M	<b>10441</b>	HLCBSC10-12M
14,0	<b>10437</b>	HLCBSC-14M	<b>10442</b>	HLCBSC10-14M

Standard color natural. For special order parts in UL 94V-0 material, add the suffix “F” to Part No.

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick  
Specs*