


"Stay Connected" with



HEYware

a PennEngineering® Company


Heyco® Nylon PCB Supports - Blind and Key Slot Mount

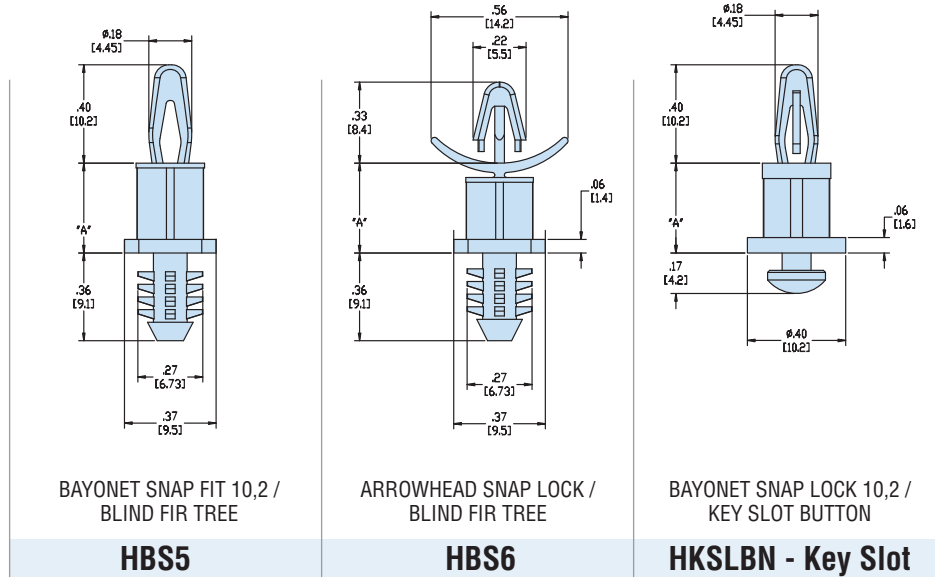

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Slot Width	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
Chassis	.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram	

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.						
.125	3,2					10611	HKSLBN-02
.187	4,8	10587	HBS5-03				
.250	6,4	10588	HBS5-04	10596	HBS6-04	10612	HKSLBN-04
.375	9,5	10589	HBS5-06	10597	HBS6-06	10613	HKSLBN-06
.437	11,1	10590	HBS5-07				
.500	12,7	10591	HBS5-08	10598	HBS6-08	10614	HKSLBN-08
.625	15,9	10592	HBS5-10	10599	HBS6-10		
.750	19,1	10593	HBS5-12	10600	HBS6-12		
.875	22,2	10594	HBS5-14	10601	HBS6-14		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.



Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick
Specs*