



## Heyco® Nylon PCB Supports - Stackable Self-Retaining Spacers

- May be stacked for multi-level PCB applications.
- Self aligning.
- One end locks into PCB.
- Clear hole variations for #4, #6 or #8 screw.

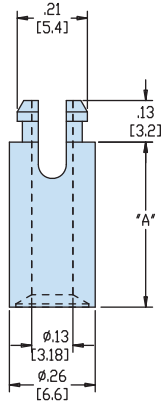


TWO PRONG SNAP LOCK / #4 SELF-TAPPING SCREW

### HSSRS4

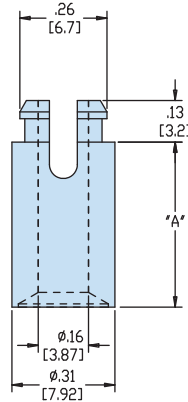

TWO PRONG SNAP LOCK / #6 SELF-TAPPING SCREW

### HSSRS6

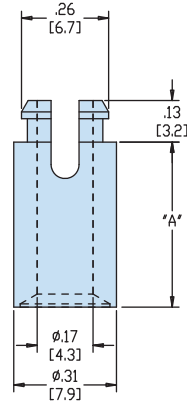

TWO PRONG SNAP LOCK / #8 SELF-TAPPING SCREW

### HSSRS8



|                | Maximum Thickness |     | Mounting Hole Diameter |     | Maximum Thickness |     | Mounting Hole Diameter |     | Maximum Thickness |     | Mounting Hole Diameter |     |
|----------------|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|
|                | in.               | mm. | in.                    | mm. | in.               | mm. | in.                    | mm. | in.               | mm. | in.                    | mm. |
| <b>PCB</b>     | .062              | 1,6 | .187                   | 4,7 | .062              | 1,6 | .232                   | 5,9 | .062              | 1,6 | .232                   | 5,9 |
| <b>Chassis</b> | self-tapping      |     | #4                     |     | self-tapping      |     | #6                     |     | self-tapping      |     | #8 M4                  |     |

| A     |      | PART NO.<br>FR Natural | DESCRIPTION | PART NO.<br>FR Natural | DESCRIPTION | PART NO.<br>Natural* | DESCRIPTION           |
|-------|------|------------------------|-------------|------------------------|-------------|----------------------|-----------------------|
| in.   | mm.  |                        |             |                        |             |                      |                       |
| .125  | 3,2  | <b>3681</b>            | HSSRS4-02   |                        |             |                      |                       |
| .187  | 4,8  | <b>3683</b>            | HSSRS4-03   |                        |             |                      |                       |
| .250  | 6,4  | <b>3684</b>            | HSSRS4-04   | <b>3689</b>            | HSSRS6-04   | <b>10857</b>         | HSSRS8-04             |
| .312  | 7,9  | <b>10926</b>           | HSSRS4-05   |                        |             | <b>10858</b>         | HSSRS8-05 <b>NEW!</b> |
| .375  | 9,5  | <b>3685</b>            | HSSRS4-06   | <b>3690</b>            | HSSRS6-06   | <b>10859</b>         | HSSRS8-06             |
| .413  | 10,5 | <b>3686</b>            | HSSRS4-413  |                        |             |                      | <b>NEW!</b>           |
| .437  | 11,1 | <b>10928</b>           | HSSRS4-07   |                        |             | <b>10860</b>         | HSSRS8-07 <b>NEW!</b> |
| .500  | 12,7 | <b>3687</b>            | HSSRS4-08   | <b>3691</b>            | HSSRS6-08   | <b>10861</b>         | HSSRS8-08             |
| .625  | 15,9 | <b>3688</b>            | HSSRS4-10   | <b>3692</b>            | HSSRS6-10   | <b>10862</b>         | HSSRS8-10             |
| .750  | 19,1 | <b>10931</b>           | HSSRS4-12   |                        |             | <b>10863</b>         | HSSRS8-12 <b>NEW!</b> |
| .875  | 22,2 | <b>10932</b>           | HSSRS4-14   |                        |             | <b>10864</b>         | HSSRS8-14 <b>NEW!</b> |
| 1.000 | 25,4 | <b>10933</b>           | HSSRS4-16   |                        |             | <b>10865</b>         | HSSRS8-16 <b>NEW!</b> |

Standard material is FR natural.

\*HSSRS8 standard material is UL 94V-2 natural.

*Quick Specs*

Material: Nylon 6/6  
 Flammability Rating: HSSRS4 & HSSRS6 - 94V-0; HSSRS8 - 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)