


# Heyco® Nylon PCB Supports - Rivet Mount

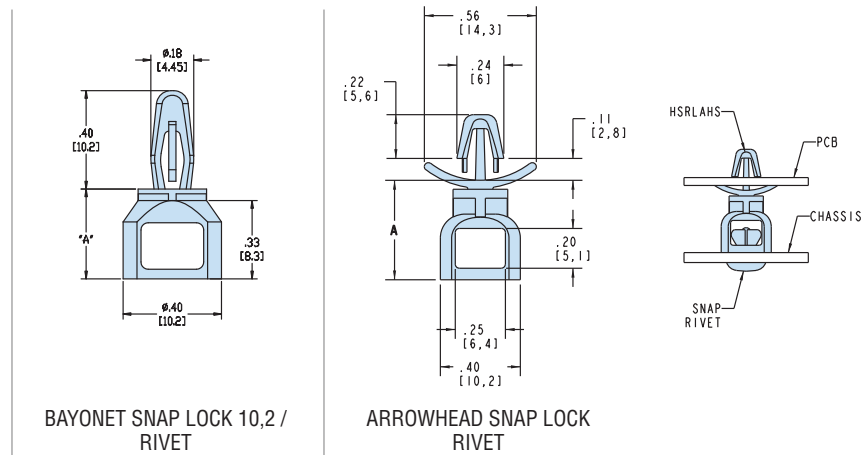

**HRLSP**                      **HSRLAHS**

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.062	1,6	.187	4,8
<b>Chassis</b>	see table		.165	4,2	see table		.161	4,0

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.				
.375	9,5	<b>10603</b>	HRLSP-06		
.437	11,1	<b>10604</b>	HRLSP-07	<b>10878</b>	HSRLAHS-07
.500	12,7	<b>10605</b>	HRLSP-08	<b>10879</b>	HSRLAHS-08
.625	15,9	<b>10606</b>	HRLSP-10	<b>10880</b>	HSRLAHS-10
.750	19,1	<b>10607</b>	HRLSP-12	<b>10881</b>	HSRLAHS-12
.875	22,2	<b>10608</b>	HRLSP-14	<b>10882</b>	HSRLAHS-14
1.000	25,4	<b>10609</b>	HRLSP-16	<b>10883</b>	HSRLAHS-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

- Rivet applied from Chassis side.

Rivet Table		
PART NO.	CHASSIS THICKNESS	
	in.	mm.
<b>9058</b>	.03 - .06	0,7 - 1,6
<b>9060</b>	.06 - .11	1,6 - 2,7
<b>9062</b>	.11 - .15	2,7 - 3,7
<b>9064</b>	.15 - .18	3,7 - 4,7
<b>9066</b>	.18 - .22	4,7 - 5,7
<b>9068</b>	.22 - .26	5,7 - 6,7
<b>9318</b>	.28 - .34	7,2 - 8,7

*Quick Specs*

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File F197049
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)