

“Stay Connected” with



HEYware

a PennEngineering® Company




## HEYClip™ MaxRunner® Cable Clip Arrays

Clip Mount or Flush Mount with Screws, accommodates up to **12 Cables**

- **Hold up to 12 cables** with wire diameters ranging from .20" (5,2 mm) to .28" (7,2 mm).
- Patented design is the ultimate multiple strand wire management.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.
- Constructed from PPE+PS flame retardant “Noryl” material with a V-0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- **Clip Mount** features a versatile, 301 stainless steel mounting clip.
- Clip is designed to secure the holder to a wide variety of aluminum extruded mounting rails of various profiles with thicknesses up to .250" (6,4 mm).
- **Flush Mount** designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.
- Recommended spacing is 4 feet.
- Load Rating not to exceed 15 lbs.
- US Patent No. 8950712B2

PANEL THICKNESS CLAMPING RANGE		WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT			
Minimum	Maximum	Minimum	Maximum			in.	mm.	in.	mm.		
<b>Clip Mount</b>											
.06	1,5	.25	6,4	.20 - .28	5,2 - 7,2	<b>S6403</b>	MaxRunner 12 Clip Mount	3.00 x 3.13	76,2 - 79,5	.98	24,9
<b>Flush Mount*</b>											
N/A: designed for flat mount				.20 - .28	5,2 - 7,2	<b>S6433</b>	MaxRunner 12 Flush Mount	3.00 x 3.13	76,2 - 79,5	1.00	25,4

\*Screws not included

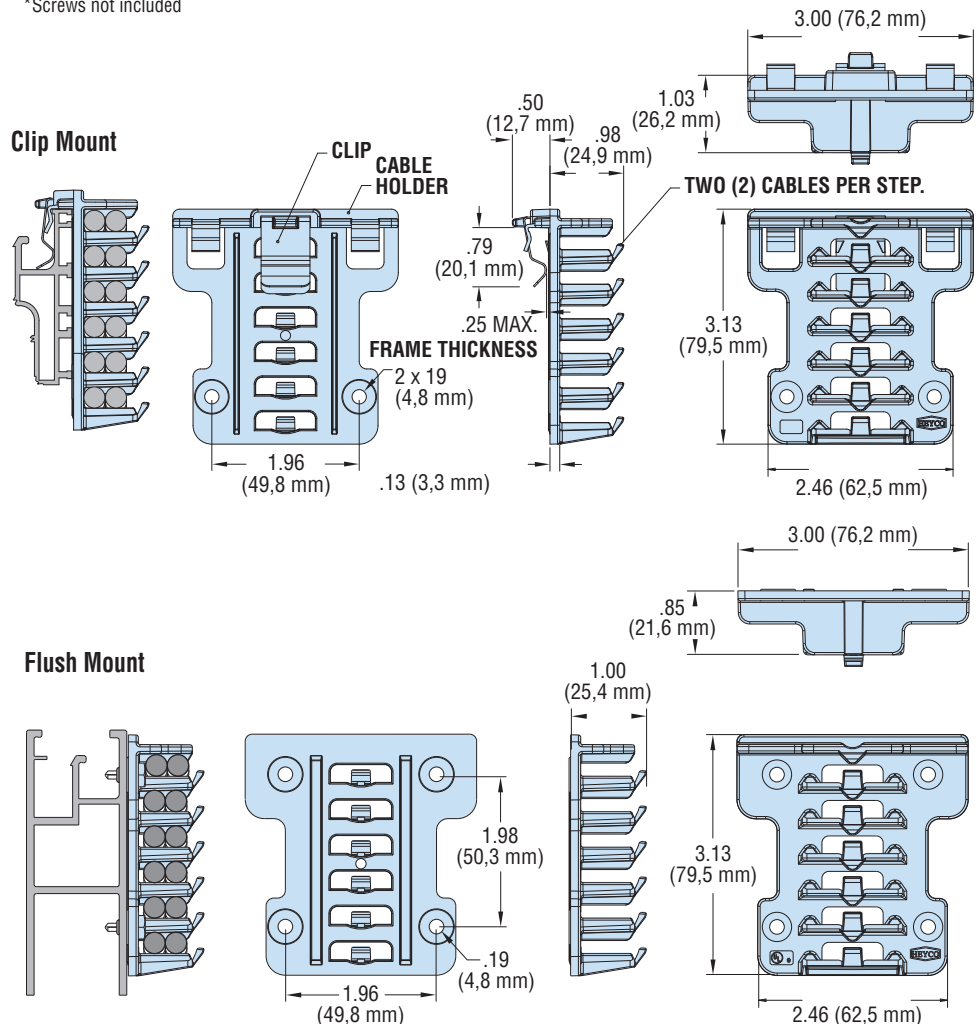

Quick Specs

Materials  
Certifications



PPE & PS Noryl (Clip Mount includes a 301 stainless steel mounting clip)  
Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523

Flammability Rating  
Temperature Range

94V-0  
-40°F (-40°C) to 203°F (95°C)