




- Lock securely and adhere to most clean, dry surfaces.
- Part No. 3309 maximum flat wire height .50" (12,7 mm), width 1.25" (31,8 mm)
- Part No. 3395 maximum flat wire height .25" (6,4 mm), width 1.25" (31,8 mm)
- Part No. 3397 maximum flat wire height .25" (6,4 mm), width 2.50" (63,5 mm)

## HEYClip™ Hinged Cable Holders

WIRE CAPACITY		PART NO. Natural	DESCRIPTION	PART DIMENSIONS									
in.	mm.			A Length		B Width		C Height		D MH Spacing			
<b>Double Arrowhead Mount</b> For Panels from .030" (0,8 mm) to .039" (1,0 mm) Thick													
.37 x 1.11	28,1 x 9,3	<b>12136</b>	CH H-37-111	1.57	40,0	.31	8,0	.52	13,3	.787	20,0	<b>NEW!</b>	
For Panels up to .118" (3,0 mm) Thick													
.55 x .75	19,1 x 13,9	<b>12139</b>	CH H-55-75	1.22	31,0	.31	8,0	.73	18,6	.630	16,0	<b>NEW!</b>	
<b>Adhesive Back Mount</b>													
.25 x 1.25	5,6 x 31,8	<b>3395</b>	CH HA-25-125*	1.75	44,5	.75	19,1	.50	12,7				
.50 x 1.25	11,2 x 31,8	<b>3309</b>	CH HA-50-125*	1.75	44,5	.75	19,1	.75	19,1				
.25 x 2.50	12,7 x 63,5	<b>3397</b>	CH HA-25-250	3.00	76,2	.75	19,1	.50	12,7				

Standard color Natural. \*Standard color Gray.

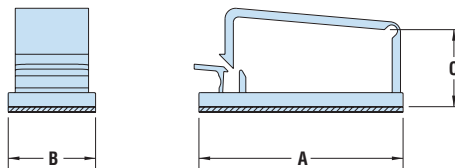


- Designed for rectangular mounting hole or edge slot mounting.
- Hinged latch design permits retrofitting into pre-wired applications.
- Route cables and protect them from sharp edges.

## HEYClip™ Hinged Edge Cable Holders

Designed for Rectangular Edge Slot or Through-Hole Mounting - suitable for retrofit applications

WIRE CAPACITY		PANEL DIMENSIONS							PART NO. Natural	DESCRIPTION	PART DIMENSIONS						
in.	mm.	Thru Hole or Edge Slot				Thickness		A			B						
in.	mm.	X	Y	Z	W	in.	mm.	in.	mm.	in.	mm.						
.77 x .20	19,5 x 5,2	.858	21,8	.421	10,7	.161	4,1	.98	25,0	.031 - 0,8 - .063	1,6	<b>3300</b>	CH HE-25	1.19	30,2	.47	12,0
								1.02	26,0	.079							
.77 x .47	19,5 x 12,0	.870	22,0	.710	18,0	.200	5,0	.98	25,0	.020 - 0,5 - .063	1,6	<b>3301</b>	CH HE-22	1.22	31,0	.75	19,0

Standard color natural.

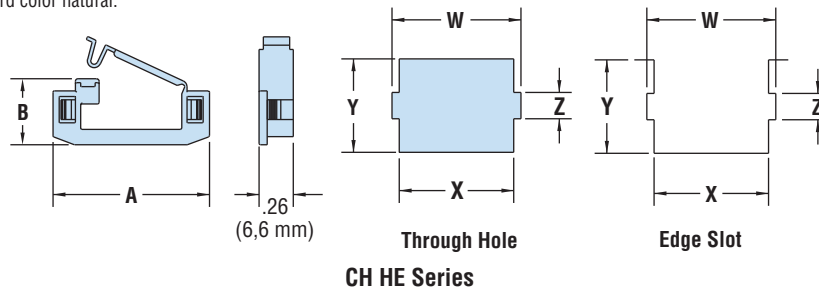

CH HE Series

Quick Specs

Material Nylon 6/6  
 Flammability Rating 94V-2  
 Temperature Range 32°F (0°C) to 185°F (85°C)