







## Heyco® Nytye® Push Mount Nylon Cable Ties

| PART SPECIFICATIONS                      |     |                      |      | PART NO. |          | DESCRIPTION     | PART DIMENSIONS |     |         |     |                 |      |                      |           |                    |           | STYLE |
|--|-----|----------------------|------|----------|----------|-----------------|-----------------|-----|---------|-----|-----------------|------|----------------------|-----------|--------------------|-----------|-------|
| Max. Tensile Strength                    |     | Max. Bundle Diameter |      | Natural  | UV Black |                 | A Length        |     | B Width |     | C Spacer Height |      | Max. Panel Thickness |           | Mounting Hole Dia. |           |       |
| Lbs.                                     | N   | in.                  | mm.  |          |          | in.             | mm.             | in. | mm.     | in. | mm.             | in.  | mm.                  | in.       | mm.                |           |       |
| <b>Tension Wings</b>                     |     |                      |      |          |          |                 |                 |     |         |     |                 |      |                      |           |                    |           |       |
| 40                                       | 178 | 1.42                 | 36,0 | -        | 3907†    | PWMS-155-HSB    | 6.23            | 158 | .14     | 3,5 | -               | -    | .09                  | 2,3       | .187               | 4,7       | 1     |
| 50                                       | 222 | 1.57                 | 40,0 | 13254    | 13254B   | PMT-50-070      | 7.09            | 180 | .19     | 4,8 | -               | -    | .09                  | 2,4       | .187               | 4,7       | 2     |
|  |     | 1.75                 | 44,5 | 3904     | 3905     | PMT 150         | 8.00            | 203 | .19     | 4,8 | -               | -    | .13                  | 3,2       | .250               | 6,4       | 1     |
| <b>Tension Wings, Standoff</b>           |     |                      |      |          |          |                 |                 |     |         |     |                 |      |                      |           |                    |           |       |
| 18                                       | 80  | .75                  | 19,1 | 13262    | 13262B   | PMST-18-050-156 | 5.04            | 128 | .10     | 2,5 | .24             | 6,1  | .08                  | 2,0       | .156               | 4,0       | 3     |
| 40                                       | 178 | 1.38                 | 35,0 | 13267    | 13267B   | PMST-40-066-197 | 6.69            | 170 | .14     | 3,6 | .51             | 13,0 | .08                  | 2,0       | .197               | 5,0       |       |
|  |     | 1.25                 | 31,8 | 13268    | 13268B   | PMST-40-068-187 | 6.81            | 173 | .14     | 3,6 | .78             | 19,8 | .08                  | 2,0       | .187               | 4,7       |       |
| <b>Cupped Base, Standoff, Releasable</b> |     |                      |      |          |          |                 |                 |     |         |     |                 |      |                      |           |                    |           |       |
| 30                                       | 133 | 1.25                 | 31,8 | 13273    | 13273B   | PMRS-30-066     | 6.63            | 168 | .14     | 3,6 | .53             | 13,5 | .023 - .098          | 0,6 - 2,5 | .236 - .255        | 6,0 - 6,5 | 4     |

**NEW!**

Standard color natural and UV Black. Consult Heyco for heat-stabilized material and colors.

† cURus

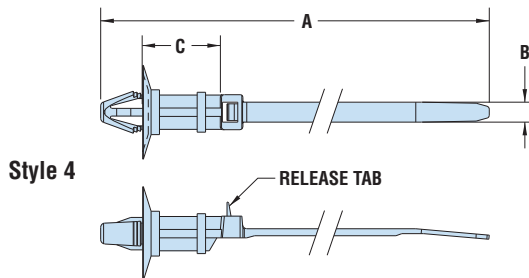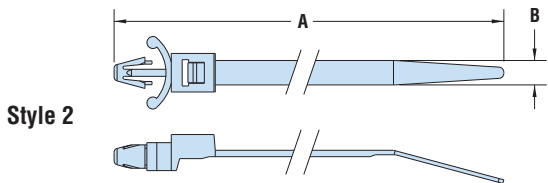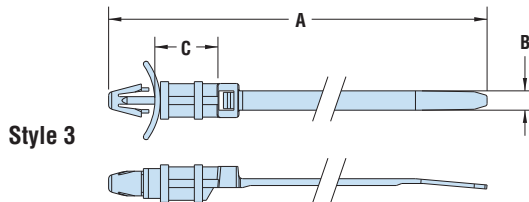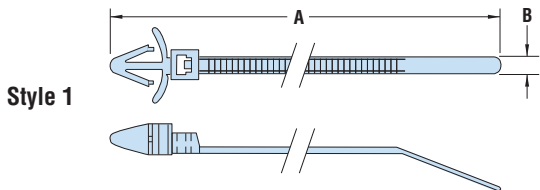

*Quick Specs*

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)