


“Stay Connected” with



HEYware


a PennEngineering® Company

Heyco® Nylon PCB Supports - Imperial Spacing

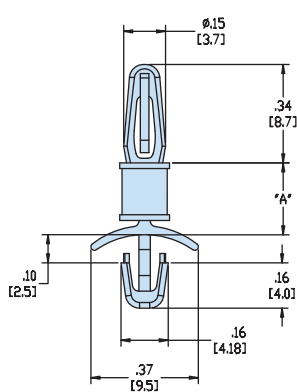


BAYONET SNAP LOCK 8,7 /
ARROWHEAD SNAP LOCK

HLSP9

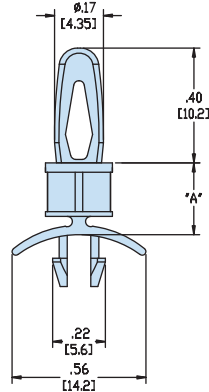


BAYONET SNAP FIT 10,2 /
WINGED TWO PRONG SNAP LOCK

HLSP10



BAYONET SNAP LOCK 8,7 /
TWO PRONG SNAP LOCK

HLSP11



BAYONET SNAP LOCK 8,7 /
TEARDROP SNAP LOCK

HTLSP

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.125	3,2	.062	1,6	.157	4,0	.062	1,6	.125	3,2	.062	1,6	.098	2,5
Chassis	.078	2,0	.125	3,2	.078	2,0	.187	4,8	.062	1,6	.125	3,2	.062	1,6	.125	3,2

A		PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
in.	mm.								
.125	3,2	10160	HLSP9-02			10178	HLSP11-02	10190	HTLSP-02
.187	4,8	10161	HLSP9-03	10170	HLSP10-03	10179	HLSP11-03	10191	HTLSP-03
.250	6,4	10162	HLSP9-04	10171	HLSP10-04	10180	HLSP11-04	10192	HTLSP-04
.312	7,9	10163	HLSP9-05			10181	HLSP11-05	10193	HTLSP-05
.375	9,5	10164	HLSP9-06	10172	HLSP10-06	10182	HLSP11-06	10194	HTLSP-06
.437	11,1	10165	HLSP9-07			10183	HLSP11-07	10195	HTLSP-07
.500	12,7	10166	HLSP9-08	10173	HLSP10-08	10184	HLSP11-08	10196	HTLSP-08
.562	14,3	10167	HLSP9-09			10185	HLSP11-09		
.625	15,9	10168	HLSP9-10	10174	HLSP10-10	10186	HLSP11-10	10197	HTLSP-10
.750	19,1			10175	HLSP10-12	10187	HLSP11-12		
.875	22,2			10176	HLSP10-14	10188	HLSP11-14		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick
Specs*