



















## Heyco® Edge Clips

Edge Clips Unassembled or Assembled with 8" Cable Tie

- Ideal for use where holes cannot be used or where adhesives are unacceptable due to temperature issues.
- Applies easily to plastic and metal without the need for a mounting hole.
- Ideal for assembly usage. Clip provides low insertion force and high extraction.
- Two piece assembly allows the clip to slide along the strap ensuring proper orientation.
- For Acetal Cable ties add “A” to the Assembled Part No.; eg 14275A.

UNASSEMBLED EDGE CLIP			EDGE CLIP ASSEMBLED WITH CABLE TIE			ASSEMBLED NYTYE CABLE TIE					
Fixing	Part No. Black	Desc.	Cable Tie Orientation	Part No. Black	Description	Tensile Strength		Max. Bundle Diameter		Overall Length	
						Lbs.	N	in.	mm.	in.	mm.
For Panels from .04" (1,0 mm) to .12" (3,0 mm) Thick											
Top	14267	NTEC1-TB	Perpendicular	14275	NTEC1-TP-50-078	50	222	1.77	45,0	7.87	200
			Parallel	14276	NTEC1-TL-50-078						
Side	14268	NTEC1-SB	Perpendicular	14277	NTEC1-SP-50-078	50	222	1.77	45,0	7.87	200
			Parallel	14278	NTEC1-SL-50-078						
For Panels from .12" (3,0 mm) to .24" (6,0 mm) Thick											
Top	14270	NTEC2-TP	Perpendicular	14280	NTEC2-TP-50-078	50	222	1.77	45,0	7.87	200
			Parallel	14281	NTEC2-TL-50-078						
Side	14272	NTEC2-SP	Perpendicular	14282	NTEC2-SP-50-078	50	222	1.77	45,0	7.87	200
			Parallel	14283	NTEC2-SL-50-078						

Standard color black.

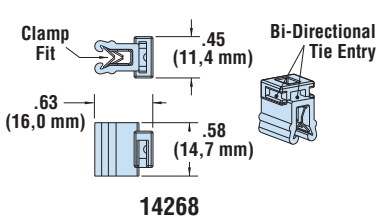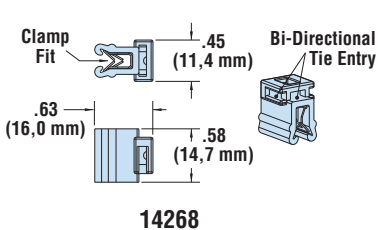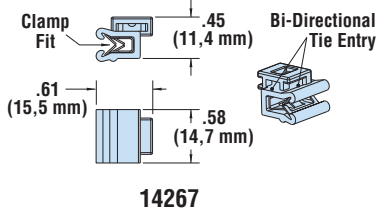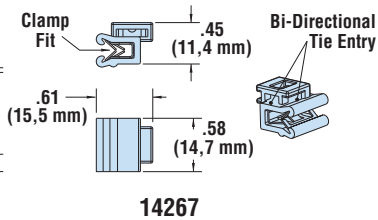

Material	Nylon 6/6 high impact modified, heat and UV stabilized
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)