




## HEYClip™ Nylon Arrow Clips

### Maximum Assembled Panel Sequence


- **Hollow body design** allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely.
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure—no tools required.
- Vibration, abrasion, and corrosion resistant.

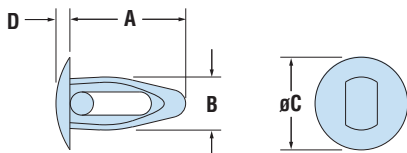

AC/ACT Series



- Webbed body design for stronger retention force.
- Part description: HMB X-Y where X = average Mounting Hole Diameter (inches) and Y = average Assembled Panel Thickness.



HMB Series

Quick  
Specs

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum		Natural	Black		A		B		C		D	
in.	mm.	in.	mm.	in.	mm.	in.	mm.				Length	Clip Dia.	Head Dia.	Head Height	in.	mm.	in.	mm.
<b>AC Series</b> For combined Panel Thickness ≤ .250" (6,4 mm)																		
.10	2,5	.04	1,0	.190	4,8	.180	4,6	<b>0325</b>	<b>0325B</b>	AC 1996	.45	11,4	.22	5,5	.36	9,1		
				.122	3,1	.118	3,0	<b>0315</b>	<b>0315B</b>	AC 15	.39	9,9	.15	3,8		.06	1,5	
				.135	3,4	.130	3,3	<b>0302</b>	<b>0302B</b>	AC 2	.38	9,7	.16	4,1	.28	7,1		
				.165	4,2	.160	4,1	<b>0318</b>	<b>0318B</b>	AC 18 *	.40	10,2	.19	4,7	.28	7,1	.08	2,0
.13	3,2	.06	1,6	.192	4,9	.182	4,6	<b>0301</b>	<b>0301B</b>	AC 1	.42	10,5	.23	5,7	.36	9,1		
				.212	5,4	.192	4,9	<b>0328</b>	<b>0328B</b>	AC 28	.45	11,4	.24	6,0	.38	9,5		
				.223	5,7	.213	5,4	<b>0307</b>	<b>0307B</b>	AC 7	.45	11,4	.22	5,6	.37	9,4		
.14	3,6	.13	3,2	.132	3,4	.130	3,3	<b>0313</b>	<b>0313B</b>	AC 13	.32	8,1	.16	4,1	.28	7,1	.06	1,5
.15	3,7	.06	1,6	.161	4,1	.151	3,8	<b>0304</b>	<b>0304B</b>	AC 4	.40	10,2	.18	4,6				
.16	4,1	.06	1,6	.223	5,7	.213	5,4	<b>0305</b>	<b>0305B</b>	AC 5	.52	13,2	.25	6,3	.37	9,4		
		.17	4,2	.192	4,9	.182	4,6	<b>0311</b>	<b>0311B</b>	AC 11	.52	13,2	.21	5,2				
.19	4,7	.06	1,6	.223	5,7	.213	5,4	<b>0326</b>	<b>0326B</b>	AC 1668	.49	12,5	.25	6,3	.63	15,9	.10	2,5
		.13	3,2	.260	6,6	.250	6,4	<b>0309</b>	<b>0309B</b>	AC 9	.58	14,6	.29	7,4	.48	12,3	.07	1,8

<b>ACT Series</b> For combined Panel Thickness > .250" (6,4 mm)																		
.30	7,6	.29	7,4	.150	3,8	.145	3,7	<b>0314</b>	<b>0314B</b>	ACT 14	.53	13,5	.20	5,0	.27	6,9		
.34	8,6	.06	1,6	.335	8,5	.320	8,1	<b>0317</b>	<b>0317B</b>	ACT 17	.90	22,9	.38	9,5	.68	17,3	.07	1,7
.38	9,7	.36	9,1	.260	6,6	.250	6,4	<b>0316</b>	<b>0316B</b>	ACT 16	.81	20,6	.28	7,0	.61	15,5		

Standard color natural. Consult Heyco for black and other colors.  
 \*AC 18 minimum panel thickness is .03" (0,8 mm), head height is .08" (2,0 mm)



## HEYClip™ Shorty Mounting Buttons

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum		Natural	Black		A		B		C		D	
in.	mm.	in.	mm.	in.	mm.	in.	mm.				Length	Clip Dia.	Head Dia.	Head Height	in.	mm.	in.	mm.
.08	2,1	.06	1,5	.126	3,2	.122	3,1	<b>4138</b>	-	HMB 124-07	.24	6,0	.13	3,4	.28	7,0	.05	1,2
.14	3,5	.08	2,0	.126	3,2	.118	3,0	<b>4139</b>	-	HMB 122-11	.32	8,3	.14	3,5	.29	7,4	.06	1,4
.10	2,5	.08	2,0	.127	3,2	.122	3,1	<b>4199</b>	<b>4199B</b>	HMB 125-09	.33	8,4	.09	2,2	.28	7,1	.05	1,2
		.11	2,9	.141	3,6	.131	3,3	<b>4200</b>	<b>4200B</b>	HMB 136-13.5	.44	11,1	.13	3,2	.41	10,3	.07	1,7
.16	4,0	.10	2,5	.192	4,9	.181	4,6	<b>4201</b>	<b>4201B</b>	HMB 187-13	.43	10,9	.16	4,0	.50	12,7	.09	2,2
.25	6,4	.13	3,2	.260	6,6	.250	6,4	<b>0321</b>	<b>0321B</b>	HMB 255-19	.63	16,0	.28	7,1	.50	12,7	.05	1,3
.33	8,4	.31	7,9	.192	4,9	.182	4,6	<b>0306</b>	<b>0306B</b>	HMB 187-32	.55	14,0	.23	5,7	.38	9,7	.06	1,5
.75	19,1	.50	12,7	.260	6,6	.250	6,4	<b>0324</b>	<b>0324B</b>	HMB 255-62.5	1.14	28,8	.29	7,3	.61	15,5	.07	1,7

Standard color natural and black except for Part Nos. **4138** and **4139**

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)