

“Stay Connected” with




HEYware

a PennEngineering® Company


Heyco® Nylon PCB Supports - Imperial Spacing

ALL NEW PRODUCT!

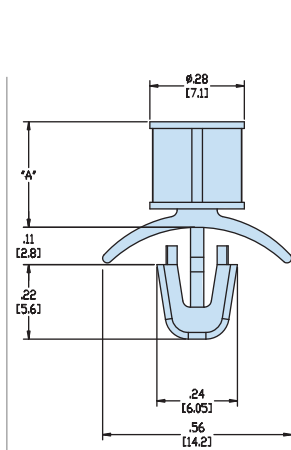


FLAT TOP REST MOUNT /
ARROWHEAD LOCK

HPS

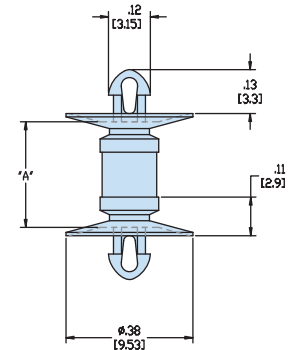


CUPPED TEARDROP /
CUPPED TEARDROP

HCDLCBST

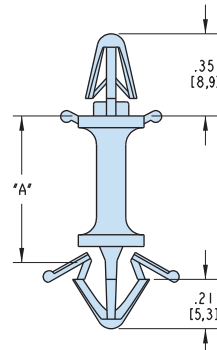

ARROWHEAD SNAP LOCK /
ARROWHEAD SNAP LOCK

HSSL

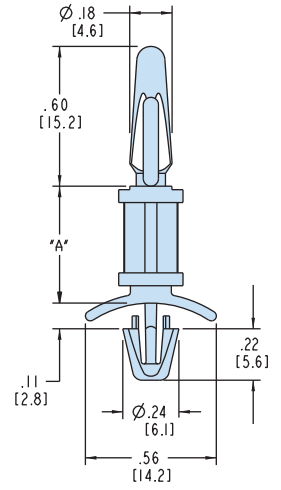

BAYONET SNAP LOCK 15.2 /
ARROWHEAD SNAP LOCK

HLNCBS

| | Maximum Thickness | | Mounting Hole Diameter | | Maximum Thickness | | Mounting Hole Diameter | | Maximum Thickness | | Mounting Hole Diameter | |
|----------------|---------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|
| | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. |
| PCB | flat top rest mount | | | | .062 | 1,6 | .098 | 2,5 | .062 | 1,6 | .157 | 4,0 |
| Chassis | .078 | 2,0 | .187 | 4,8 | .062 | 1,6 | .098 | 2,5 | .070 | 1,8 | .188 | 4,8 |

| A | PART NO. | DESCRIPTION | PART NO. | DESCRIPTION | PART NO. | DESCRIPTION | PART NO. | DESCRIPTION | |
|------|----------|--------------|----------|--------------|-------------|-------------|----------|--------------|-----------|
| | | | | | | | | | in. |
| .187 | 4,8 | 10233 | HPS-03 | 10836 | HCDLCBST-03 | 3670 | HSSL-03 | 10966 | HLNCBS-03 |
| .250 | 6,4 | 10234 | HPS-04 | 10837 | HCDLCBST-04 | 3671 | HSSL-04 | 10967 | HLNCBS-04 |
| .312 | 7,9 | 10235 | HPS-05 | 10838 | HCDLCBST-05 | | | | |
| .375 | 9,5 | 10236 | HPS-06 | 10839 | HCDLCBST-06 | 3672 | HSSL-06 | 10969 | HLNCBS-06 |
| .437 | 11,1 | 10237 | HPS-07 | 10840 | HCDLCBST-07 | 3673 | HSSL-07 | | |
| .500 | 12,7 | 10238 | HPS-08 | 10841 | HCDLCBST-08 | 3674 | HSSL-08 | 10971 | HLNCBS-08 |
| .562 | 14,3 | | | 10842 | HCDLCBST-09 | | | | |
| .625 | 15,9 | 10239 | HPS-10 | 10843 | HCDLCBST-10 | 3675 | HSSL-10 | 10973 | HLNCBS-10 |
| .750 | 19,1 | 10240 | HPS-12 | | | 3676 | HSSL-12 | 10974 | HLNCBS-12 |
| .875 | 22,2 | 10241 | HPS-14 | | | | | 10975 | HLNCBS-14 |

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

*Consult Heyco for HCDLCBST in V-0 material.

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

Quick Specs