

“Stay Connected” with



HEYware

a PennEngineering® Company




Heyco® Polyurethane Adhesive-Back Bumpers


PART DIMENSIONS				PART NO.		DESCRIPTION	Pieces per Sheet	
A Diameter		B Height		Clear	Black			
in.	mm.	in.	mm.					
HSA Series - Hemi								
.25	6,4	.06	1,6	N040	N140	HBA 250-06	578	
.31	7,9	.09	2,3	N027	N127	HBA 312-09	450	
.34	8,6	.09	2,3	N007	N107	HBA 335-09		
.38	9,7	.15	3,8	N012	N112	HBA 375-15		200
.44	11,2	.20	5,1	N002	N102	HBA 440-20	242	
.62	15,7	.31	7,9	N015	N115	HBA 620-31	128	
.70	17,8	.38	9,7	N008	N108	HBA 700-38	98	
.75	19,1	.08	1,9	N039	N139	HBA 750-08	84	
CBA Series - Cylinder								
NEW!	.38	9,7	.13	3,2	N034	N134	CBA 370-13	300
			.19	4,8	N035	N135	CBA 370-19	200
NEW!	.50	12,7	.06	1,5	N005	N105	CBA 500-06	200
			.14	3,6	N001	N101	CBA 500-14	
			.25	6,4	N006	N106	CBA 500-25	
			.40	10,2	N011	N111	CBA 650-40	
.78	19,8	.20	5,1	N041	N141	CBA 780-20	84	
.81	20,6	.12	3,0	N024	N124	CBA 810-12	72	
CDBA Series - Pocket								
.50	12,7	.14	3,6	N018	N118	CDBA 500-14	200	
.88	22,4	.40	10,2	N017	N117	CDBA 880-40	72	
1.81	46,0	.60	15,2	N030	N130	CDBA 1810-60	1	
TBA Series - Square or Tapered								
NEW!	.40	10,2	.10	2,5	N020	N120	TBA 4040-10	242
NEW!	.50	12,7	.12	3,0	N009	N109	TBA 5050-12	200
			.23	5,8	N03R	N13R	TBA 5050-23	
.81	20,6	.30	7,6	N019	N119	TBA 8181-30	98	

Standard colors clear and black. For white, gray or brown consult Heyco.


- Quick and easy installation—simply peel off backing and press into place. With no holes to drill, and no screws or rivets needed, adhesive backed bumpers will save you time and money.
- Bumpers can be attached to a wide variety of surfaces; aluminum, ceramic, formica, glass, painted surfaces, polyethylene, polypropylene, vinyl, and steel.
- Adhesive backed bumpers are nonmarking, nonstaining, skid, and scratch resistant.
- Surface must be clean, dry, and free of grease, oil, and other common solvents to obtain maximum adhesion. Clean surfaces with low strength solvents such as Isopropyl Alcohol or Heptane.
- Bumpers have a rubber-based pressure sensitive adhesive with an end use temperature of 0°F (-18°C) to 180°F (82°C).
- Standard colors clear and black. White, gray and brown available, please consult Heyco.




HSA-Hemi



CBA-Cylinder

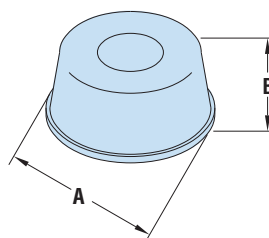

CDBA-Pocket

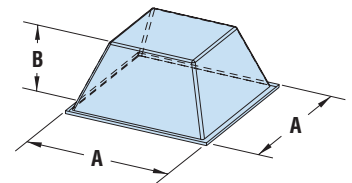

TBA-Square or Tapered

Material
Certifications

Polyurethane
 Recognized under the Component Program of Underwriters' Laboratories File E196663

Flammability Rating
Temperature Range

HB
0°F (-18°C) to 180°F (82°C)

Quick
Specs