




Heyco® Feet of Strength Feet with Push Rivet

| PART DIMENSIONS | | | | | | PANEL DIMENSIONS | | | | PART NO. Black | DESCRIPTION | | | | |
|---------------------|-------------------|-----|----------------------|-----|------------------------|------------------|-----|------|-----|----------------|-------------|-------------|---------------|-------------|---------------|
| A Overall Height | B Top Diameter | | C Bottom Diameter | | Mounting Hole Diameter | Thickness Range | | | | | | | | | |
| | in. | mm. | in. | mm. | | in. | mm. | in. | mm. | | | | | | |
| FSR Series | | | | | | | | | | | | | | | |
| .16 | 4,0 | .43 | 10,8 | .39 | 10,0 | .142 | 3,6 | .02 | 0,5 | .05 | 1,2 | 2519 | FSR 16-14-05 | | |
| | | | | | | | | .05 | 1,2 | .08 | 2,0 | 2520 | FSR 16-14-08 | | |
| | | | | | | | | .06 | 1,5 | .10 | 2,5 | 2521 | FSR 16-14-10 | | |
| | | | | | | | | .10 | 2,5 | .14 | 3,5 | 2550 | FSR 16-14-14 | | |
| .17 | 4,2 | .83 | 21,0 | .79 | 20,0 | .165 | 4,2 | .03 | 0,8 | .07 | 1,8 | 2522 | FSR 17-17-07 | | |
| | | | | | | | | .07 | 1,8 | .11 | 2,8 | 2523 | FSR 17-17-11 | | |
| | | | | | | | | .11 | 2,9 | .15 | 3,7 | 2524 | FSR 17-17-15 | | |
| | | | | | | | | .15 | 3,8 | .19 | 4,8 | 2525 | FSR 17-17-19 | | |
| .22 | 5,5 | .56 | 14,2 | .53 | 13,5 | .122 | 3,1 | .03 | 0,8 | .07 | 1,8 | 2517 | FSR 22-12-07 | | |
| | | | | | | | | .07 | 1,8 | .11 | 2,8 | 2518 | FSR 22-12-11 | | |
| .24 | 6,0 | .59 | 15,0 | .55 | 14,0 | .165 | 4,2 | .02 | 0,6 | .04 | 1,0 | 2500 | FSR 24-17-04 | | |
| | | | | | | | | | | .04 | 1,0 | .08 | 2,0 | 2501 | FSR 24-17-08 |
| | | | | | | | | | | .08 | 2,0 | .12 | 3,1 | 2502 | FSR 24-17-12 |
| | | | | | | .204 | 5,2 | .03 | 0,8 | .05 | 1,2 | 2506 | FSR 24-21-05 | | |
| | | | | | | | | | | .05 | 1,3 | .09 | 2,3 | 2507 | FSR 24-21-09 |
| .24 | 6,0 | .83 | 21,0 | .79 | 20,0 | | | .165 | 4,2 | .03 | 0,8 | .07 | 1,8 | 2526 | FSR 241-17-07 |
| | | | | | | | | .08 | 1,9 | .11 | 2,8 | 2527 | FSR 241-17-11 | | |
| | | | | | | | | .11 | 2,9 | .16 | 4,0 | 2528 | FSR 241-17-16 | | |
| .31 | 8,0 | .83 | 21,0 | .79 | 20,0 | .165 | 4,2 | .01 | 0,3 | .03 | 0,8 | 2575 | FSR 31-17-03 | | |
| | | | | | | | | .03 | 0,8 | .08 | 2,0 | 2529 | FSR 31-17-08 | | |
| | | | | | | | | .08 | 2,1 | .12 | 3,1 | 2530 | FSR 31-17-12 | | |
| .35 | 9,0 | .59 | 15,0 | .55 | 14,0 | .165 | 4,2 | .04 | 1,0 | .08 | 2,0 | 2532 | FSR 35-17-08 | | |
| | | | | | | | | .08 | 2,0 | .12 | 3,1 | 2533 | FSR 35-17-12 | | |

Standard color black.

- Require only fingertip pressure for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .16" (4,0 mm) to .35" (9,0 mm).
- Part Description Key:
FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

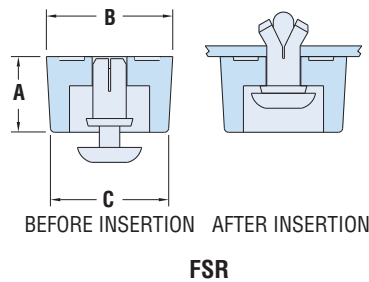

Material: Thermoplastic Rubber (TPR)
 Flammability Rating: 94-HB
 Temperature Range: -30°F (-34°C) to 250°F (121°C)

*Quick
Specs*