

Nylon Liquid Tight Strain Relief Fittings



90° Snap Elbow - PG / NPT / Metric Threads



Part Numbers				Cable Range	Thread Type & Size	Dimensions in Inches (mm)					
-40°F to 212°F (-40°C to 100°C)						A	B	C	H	TL	F
Dome Fittings		Flex Fittings		Inches (mm)	See Page 56 for thread specs	Clearance Hole	Body Length (Dome)	Body Length (Flex)	Height	Thread Length	Wrench Flats
Black	Gray	Black	Gray			+ .01" (+.25 mm)					
ED09AA-BK	ED09AA-GY	EF09AA-BK	EF09AA-GY	.16 - .31 (4 - 8)	PG 9	.60 (15.2)	1.77 (45)	3.35 (85)	.91 (23)	.31 (8)	.75 (19)
ED09AR-BK	ED09AR-GY	EF09AR-BK	EF09AR-GY	.08 - .24 (2 - 6)							
ED11AA-BK	ED11AA-GY	EF11AA-BK	EF11AA-GY	.20 - .39 (5 - 10)	PG 11	.73 (18.5)	1.97 (50)	4.05 (103)	1.06 (27)	.31 (8)	.87 (22)
ED11AR-BK	ED11AR-GY	EF11AR-BK	EF11AR-GY	.11 - .28 (3 - 7)							
ED13AA-BK	ED13AA-GY	EF13AA-BK	EF13AA-GY	.24 - .47 (6 - 12)	PG 13 / 13.5	.80 (20.3)	2.24 (57)	4.69 (119)	1.20 (30.5)	.35 (9)	.94 (24)
ED13AR-BK	ED13AR-GY	EF13AR-BK	EF13AR-GY	.20 - .35 (5 - 9)							
ED16AA-BK	ED16AA-GY	EF16AA-BK	EF16AA-GY	.39 - .55 (10 - 14)	PG 16	.89 (22.5)	2.32 (59)	5.12 (130)	1.28 (32.5)	.39 (10)	1.06 (27)
ED16AR-BK	ED16AR-GY	EF16AR-BK	EF16AR-GY	.28 - .47 (7-12)							
ED21AA-BK	ED21AA-GY	EF21AA-BK	EF21AA-GY	.51 - .71 (13 - 18)	PG 21	1.12 (28.4)	2.87 (73)	6.14 (156)	1.57 (40)	.43 (11)	1.30 (33)
ED21AR-BK	ED21AR-GY	EF21AR-BK	EF21AR-GY	.35 - .63 (9 - 16)							
ED29AA-BK	ED29AA-GY	-	-	.71 - .98 (18 - 25)	PG 29	1.47 (37.3)	3.58 (91)	-	2.03 (51.5)	.43 (11)	1.65 (42)
ED29AR-BK	ED29AR-GY	-	-	.51 - .79 (13 - 20)							
ED09NA-BK	ED09NA-GY	EF09NA-BK	EF09NA-GY	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	1.77 (45)	3.35 (85)	.91 (23)	.59 (15)	.75 (19)
ED09NR-BK	ED09NR-GY	EF09NR-BK	EF09NR-GY	.08 - .24 (2 - 6)							
ED13NA-BK	ED13NA-GY	EF13NA-BK	EF13NA-GY	.24 - .47 (6 - 12)	1/2" NPT	.83 (21.1)	2.24 (57)	4.69 (119)	1.20 (30.5)	.51 (13)	.94 (24)
ED13NR-BK	ED13NR-GY	EF13NR-BK	EF13NR-GY	.20 - .35 (5 - 9)							
ED16NA-BK	ED16NA-GY	EF16NA-BK	EF16NA-GY	.39 - .55 (10 - 14)	1/2" -E NPT	.83 (21.1)	2.32 (59)	5.12 (130)	1.28 (32.5)	.51 (13)	1.06 (27)
ED16NR-BK	ED16NR-GY	EF16NR-BK	EF16NR-GY	.28 - .47 (7-12)							
ED21NA-BK	ED21NA-GY	EF21NA-BK	EF21NA-GY	.51 - .71 (13 - 18)	3/4" NPT	1.05 (26.7)	2.87 (73)	6.14 (156)	1.57 (40)	.51 (13)	1.30 (33)
ED21NR-BK	ED21NR-GY	EF21NR-BK	EF21NR-GY	.35 - .63 (9 - 16)							
ED29NA-BK	ED29NA-GY	-	-	.71 - .98 (18 - 25)	1" NPT	1.35 (34.3)	3.58 (91)	-	2.03 (51.5)	.75 (19)	1.65 (42)
ED29NR-BK	ED29NR-GY	-	-	.51 - .79 (13 - 20)							
ED16MA-BK	ED16MA-GY	EF16MA-BK	EF16MA-GY	.16 - .31 (4 - 8)	M16 X 1.5	.63 (16)	1.77 (45)	3.35 (85)	.91 (23)	.31 (8)	.75 (19)
ED16MR-BK	ED16MR-GY	EF16MR-BK	EF16MR-GY	.08 - .24 (2 - 6)							
ED20MA-BK	ED20MA-GY	EF20MA-BK	EF20MA-GY	.24 - .47 (6 - 12)	M20 X 1.5	.79 (20)	2.24 (57)	4.69 (119)	1.20 (30.5)	.35 (9)	.94 (24)
ED20MR-BK	ED20MR-GY	EF20MR-BK	EF20MR-GY	.20 - .35 (5 - 9)							
ED25MA-BK	ED25MA-GY	EF25MA-BK	EF25MA-GY	.51 - .71 (13 - 18)	M25 X 1.5	.98 (25)	2.87 (73)	6.14 (156)	1.57 (40)	.43 (11)	1.30 (33)
ED25MR-BK	ED25MR-GY	EF25MR-BK	EF25MR-GY	.35 - .63 (9 - 16)							
ED32MA-BK	ED32MA-GY	-	-	.71 - .98 (18 - 25)	M32 X 1.5	1.26 (32)	3.58 (91)	-	2.03 (51.5)	.43 (11)	1.65 (42)
ED32MR-BK	ED32MR-GY	-	-	.51 - .79 (13 - 20)							

*Metric and PG thread elbows include an O-Ring
 *Note: VDE rating applies to Metric Dome Fittings only.

Liquid Tight Elbow Strain Relief Fitting for space and time saving applications.

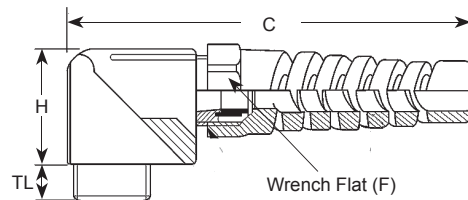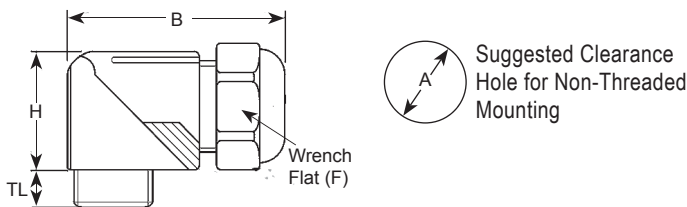

O-Ring (PG & Metric Threads Only).
 Protection O-Ring: IP 68, Buna-N.



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

For Material Specifications and Approval Information refer to page 52.

Nylon Strain Relief