


# Plenum Cable (LVT)

## Unshielded Multiconductor

### SPECIFICATIONS

CSA C22.2 No. 214

CSA FT6 (Flame and Smoke Test)

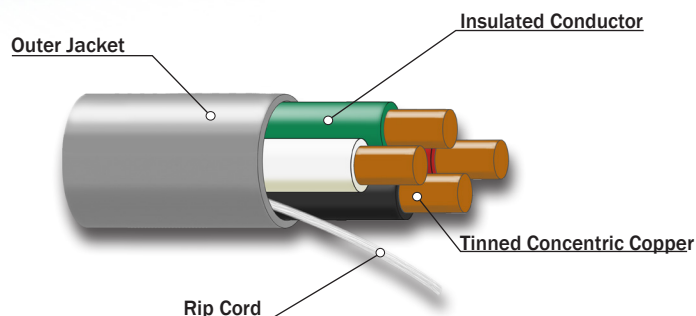

### CONSTRUCTION

**Conductor:** Bare copper

**Voltage:** 300V

**Insulation:** Polyvinyl Chloride (PVC)

**Options:** Various colours for outer jackets

**Outer Jacket:** 60°C, flame resistant, low smoke Polyvinyl Chloride (PVC), Grey

Product No.	No. of Conductors	AWG Size	Stranding	Insulation Thickness		Outer Jacket Thickness		Nominal Diameter		Cable Weight		Maximum Pulling Tension	
				inches	mm	inches	mm	Outer Jacket		Lbs/mft	kg/km	lbs	kgs
								inches	mm				
84-006	2	18	Solid	0.008	0.20	0.015	0.38	0.130	3.30	15.58	23.23	26	12
84-011	3	18	Solid	0.008	0.20	0.015	0.38	0.158	4.01	21.61	32.23	39	18
84-020	4	18	Solid	0.008	0.20	0.015	0.38	0.167	4.24	27.82	41.49	42	19
84-022	5	18	Solid	0.008	0.20	0.015	0.38	0.190	4.83	34.08	50.82	52	24
84-009	6	18	Solid	0.008	0.20	0.015	0.38	0.204	5.18	40.36	60.19	62	28
84-024	7	18	Solid	0.008	0.20	0.015	0.38	0.204	5.18	46.12	68.78	73	33
84-012	8	18	Solid	0.008	0.20	0.015	0.38	0.222	5.64	52.41	78.16	83	38
84-021	10	18	Solid	0.008	0.20	0.015	0.38	0.271	6.88	65.32	97.41	104	47

### FOR MORE INFORMATION

150 North Murray St.  
Trenton, Ontario  
(800) 263 . 3322  
[www.decacables.com](http://www.decacables.com)

 **ECA CABLES**