

Automotive cable screened FHLR91XC13X-1x4 T150 1 x 4 mm² / RADOX 155S FLR / RADOX Elastomer S


Part No: 85002132

General Properties:

Excellent resistance to high and low temperature, ozone, UV and weathering resistance, resistant to pressure at high temperature, motor oil, fuels and hydrolysis, flame retardant, high abrasion resistant, solder iron resistant, easy to strip and process. All materials are free from lead, mercury, cadmium and chrome VI.

Application:

Cable, for use in road vehicle applications.

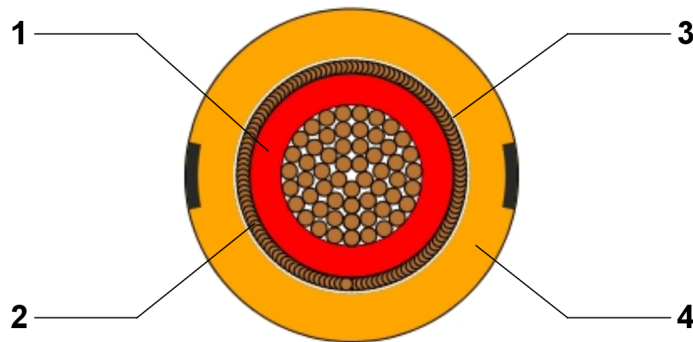

1. 1 Core 4.0 mm²
 Type RADOX 155S FLR-B

Conductor: stranded bare copper
 Insulation: RADOX 155S
 Colour: red
 Tin plated copper braid
 Tape
 RADOX Elastomer S
 Colour: orange / black

56 x 0.31 mmD
 D: 3.55 ± 0.15 mm

2. EMC-screen optimized
 3. Wrapping
 4. Sheath

D: 4.1 mm

D: 5.80 ± 0.2 mm

Printing on sheath:

H+S 85002132 - %%%%%%%%% % ATTENTION HIGH VOLTAGE MAX
 1000VAC/1500VDC %
 %%%%%%%%% = Production lot number

Technical Data:

Conductor resistance at 20 °C	4.0 mm ²	≤ 4.71	Ω/km
Voltage rating	U _o	1000	V AC
Voltage rating	V _o	1500	V DC
Test voltage, 50 Hz, 5 min.		10	kV AC
Transfer impedance	f = 10 kHz	≤ 24	mΩ/m
	f = 1 MHz	≤ 24	mΩ/m
	f = 10 MHz	≤ 44	mΩ/m
	f = 100 MHz	≤ 420	mΩ/m
Screening attenuation	f = 10 kHz	≥ 68	dB
	f = 1 MHz	≥ 68	dB
	f = 10 MHz	≥ 63	dB
	f = 100 MHz	≥ 43	dB
Temperature range (3000h)		-40 ... +150	° C
Min. bending radius	fixed		4 x cable D
	flexing		6 x cable D
Cable weight		7	kg/100m

According to:

ISO 6722-1 class D / ISO 19642-9 class D
 2000/53/EG (EU-directive on end of life vehicles) / 2011/65/EU (RoHS)

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, AS/EN 9100, ISO/TS 16949 and IRIS.

www.hubersuhner.com

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained here in are carefully complied to the best of our knowledge, but they are intended for general informational purpose only.