



Automotive databus cable

2 x 0.5 mm² / PE-X / TPU


General Properties:

Excellent resistance to high and low temperature, ozone, UV and weathering resistance, resistant to pressure at high temperature, motor oil, fuels and hydrolysis, flame retardant, high abrasion resistant, solder iron resistant, easy to strip and process, according to ISO 6722 class C, ISO 14572.

Complies with EU- directive 2000/53/EG on end of life vehicles. It is free from lead, mercury, cadmium and chrome VI.

Application:

Low voltage cable, for use in road vehicle applications.

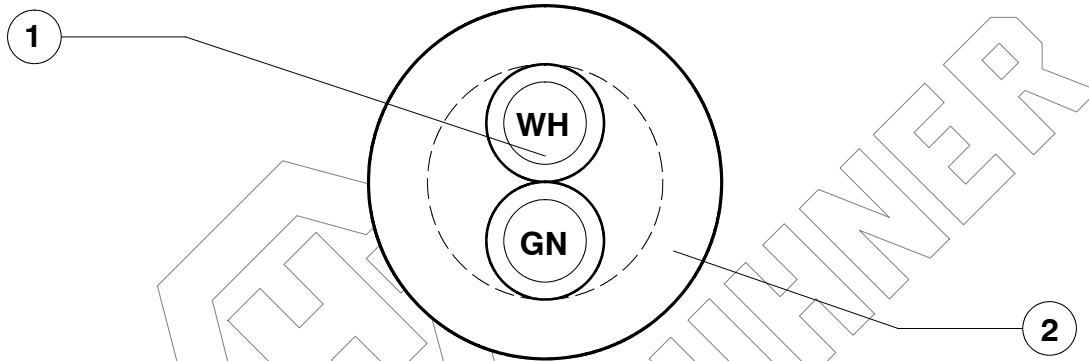

- | | | | |
|----|--|--|-------------------------------------|
| 1. | 2 Cores 0.5 mm ²
(Databus) | Conductor: stranded bare copper
Insulation: PE-X
Colours: white, green | 19 x 0.18 mm D
D: 2.20 ± 0.10 mm |
| 2. | Sheath | TPU, colour: black | D: 5.9 ± 0.3 mm |
| | <u>Printing on sheath:</u> | HUBER + SUHNER SWITZERLAND - %%% %%% %%%
Production lot number _____ | |

Technical Data:

Conductor resistance at 20 °C	≤ 39.0	Ω / km
Voltage rating	60	V
Test voltage, 50 Hz, 1 min.	2'000	V
Characteristic Impedance	f ≥ 50 kHz	120 ± 12 Ω
Twisting of cores	15	twists / m
Temperature range (3'000 h)	- 40 ... + 125	°C
Min. bending radius	fixed	4 x cable D
	flexing	6 x cable D
Cable weight per 100 m	approx. 3.7	kg

Copyright 2016 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission
Uncontrolled copy when printed [will not be updated].

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER

Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com