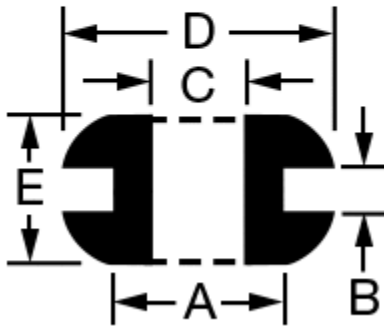

Mil. Spec. Grommet

Fits 3/4" Diameter Hole & 1/16" Thick Panel, MS-35489-149



Panel Hole Diameter (A)	3/4"
Panel Thickness (B)	1/16"
ID (C)	1/2"
OD (D)	1"
Overall Thickness (E)	1/4"
MS Dash Number	149
AN Dash Number	41
Color	Black
RoHS	Compliant

All grommets meet MIL-G-3036. Most meet MS-35489 and are AN 931 approved (dash numbers 1, 2, 3, 4, and 41 are AN 930 approved). Grommets are flexible and push into place to insulate and seal around holes in panels, as well as dampen vibration and minimize abrasion. Durometer is 50A.

Standard grommets are Buna-N rubber. They are for indoor use only; temperature range is 0° to 250° F. Color is black.