
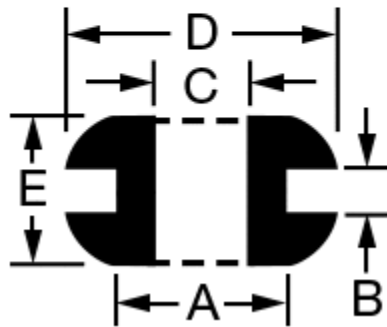


Mil. Spec. Grommet

Fits 3/4" Diameter Hole and 1/4" Thick Panel, MS-35489-97

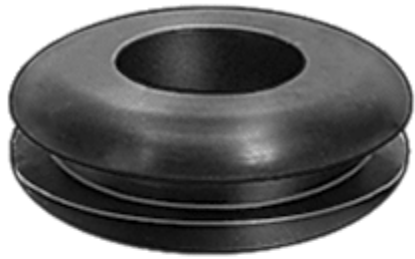

Panel Hole Diameter (A)	3/4"
Panel Thickness (B)	1/4"
ID (C)	5/16"
OD (D)	1"
Overall Thickness (E)	1/2"
MS Dash Number	97
AN Dash Number	C5-12
Color	Black
RoHS	Compliant

All grommets meet MIL-G-3036. Most meet MS-35489 and are AN 931 approved. Grommets are flexible and push into place to insulate and seal around holes in panels, as well as dampen vibration and minimize abrasion. Durometer is 50A.

Standard grommets are Buna-N rubber. They are for indoor use only; temperature range is 0° to 250° F. Color is black.