


232 Sherman Street Gardner, MA 01440  
 Phone: 978-632-0900 Fax: 978-630-1872  
 Visit us on our website: www.dataquidecable.com

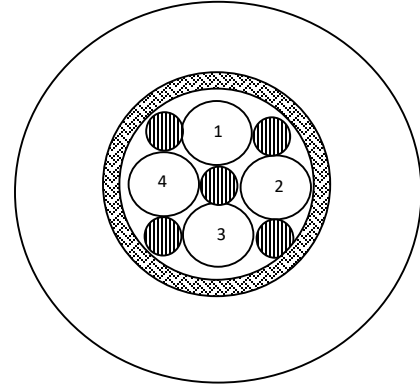

**4 CONDUCTOR 6 AWG SHIELDED CABLE – 600 VOLT**

**CONDUCTORS:**

- 6 AWG (133x27) Tinned Annealed Copper Insulated with .062" Wall of PVC to a Nominal O.D. of .336"
- 4 Conductor Total
- Color Coded as Indicated

**NOTES:**

- Polypropylene Filler in Core and Interstices
  - 12" Nominal Left Hand Direction Cable Lay
  - Overall .002" Thickness Polyester Binder Tape, 25% Overlap
  - 34 AWG Tinned Copper Braid Shield, 90% Coverage
  - Overall .100" Nominal Wall Black PVC Jacket to 1.030" +/- .040" Final Diameter
  - Jacket Method: "Pressure Extrude"
  - Surface Printed in White Ink:
- "E90298 AWM STYLE 2501 105C 600V VW-1 - - LL91737 CSA AWM I/II A/B 105C 600V FT1"

**COLOR CODE**

CONDUCTOR	COLOR
1	BLACK
2	BLACK
3	BLACK
4	GREEN/YELLOW (30% MIN. STRIPE)

**LISTINGS/AGENCY APPROVAL**

- UL AWM 1232/2501 105C 600VOLTS
- CSA AWM 105C 600V FT1
- RoHS COMPLIANT

**REVISION HISTORY**

REV	DATE	BY	DESCRIPTION
0	7/28/99	WD	INITIAL RELEASE
1	10/18/16	WD	RE-FORMAT/RE-RELEASE

Customer Number	0604COBS-0DGA
D.G. Part Number	99G22-9
Prepared By:	KAM
Reviewed By:	WJD