


2 piece fittings

Custom two piece multiple breakout fitting

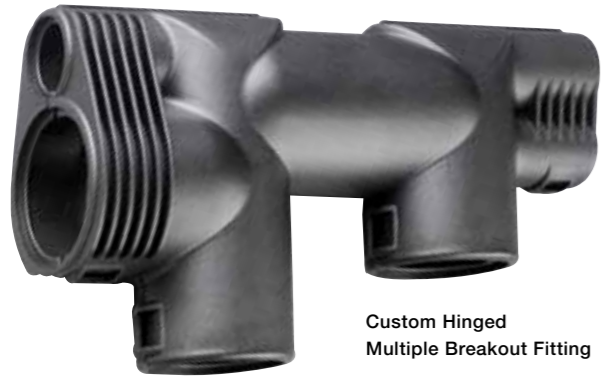

Custom Hinged
Multiple Breakout Fitting

Custom Two Piece Multiple Breakout Fitting

One-piece hinged fittings designed to suit specific project or application requirements.


| Part No. | Type | Conduit Size (NC) | | | | | | Conduit Size (NW) | | | | | | Conduit Engagement | | | | | | Nominal Dimensions | | | | | Weight |
|----------|------|-------------------|----|----|----|----|----|-------------------|-----|----|-----|----|----|--------------------|----|----|----|----|----|--------------------|------|------|------|------|--------|
| | | A | B | C | D | E | F | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | R | |
| MPS100 | 1 | 12 | 08 | 20 | 20 | 25 | 12 | 10 | 7.5 | 17 | 17 | 22 | 10 | 10 | 10 | 12 | 12 | 13 | 12 | 98mm | 43mm | 28mm | 28mm | 59mm | 22kg |
| MPS102 | 2 | 16 | 08 | 16 | 08 | 25 | - | 13 | 7.5 | 16 | 7.5 | 22 | - | 10 | 10 | 10 | 10 | 13 | - | 97mm | - | - | - | - | 23kg |



| Approvals | IP Rating | Appropriate Conduit | Fire Performance | Temperature Range |
|---|---|---------------------|--------------------|-------------------|
| CE Mark to the Low Voltage Directive | For use with: All conduits in the Harnessflex range | | Self Extinguishing | -40°C to +120°C |
| RoHS Compliant to 2011/65/EU | IP40 | Yes | Low Smoke Toxicity | |
| Conforms with End of Life Vehicle directive (ELV) EU200/53/EC | IP67 | N/A | Halogen Free | UV Resistance |
| | IP68 | N/A | | Very High |


Dimensions

Type 1

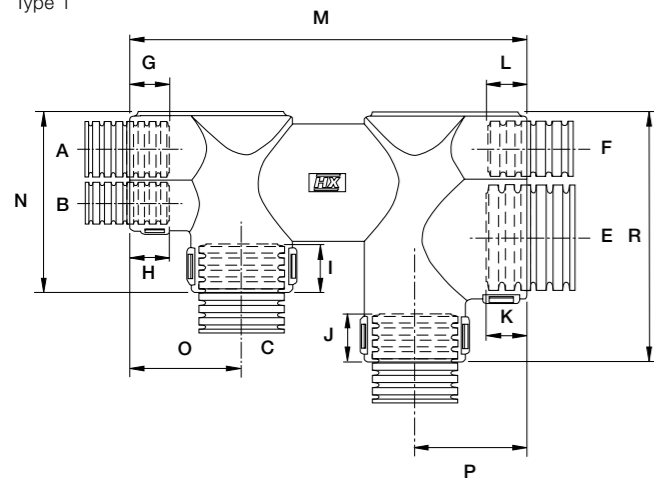

Dimensions

Type 2

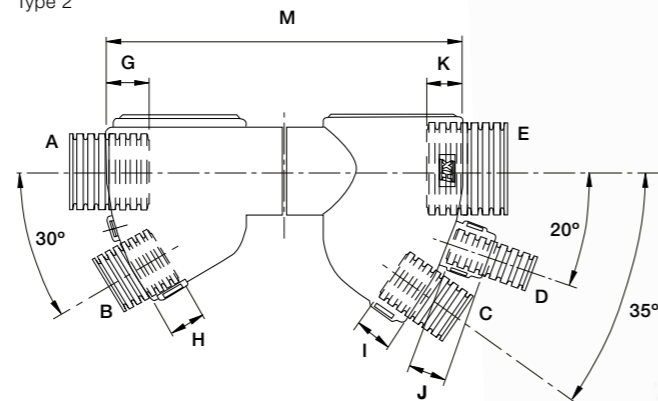

1 Multi outlet options

Connect multiple pieces of conduit to one fitting.

2 Outlets can be blanked

Certain outlets can be blanked using BPST08, BCH12 & BCH20 - See page 4/33.