

Special customised products Millflex hinged ABS interfaces & Sumitomo hinged interface



Millflex Hinged ABS Interface - Special Customised Product

Clip-on straight interface for Millflex ABS connectors.

Part No.	Conduit Size (A)		Nominal Dimensions	
	NC	NW	B	C
CI08-MF2	08	7.5	35.6mm	10mm
CI10-MF2	10	8.5	35.6mm	10mm
CI12-MF2	12	10	35.6mm	10mm

Millflex Hinged ABS Interface
Special Customised Product



Approvals

CE Mark to the Low Voltage Directive


RoHS Compliant to 2011/65/EU

Conforms with **End of Life Vehicle**

directive (ELV) EU200/53/EC

IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
For use with: All conduits in the Harnessflex range			
IP40	Yes	Self Extinguishing	-40°C to +120°C
IP67	N/A	Low Smoke Toxicity	UV Resistance Very High
IP68	N/A	Halogen Free	

Dimensions

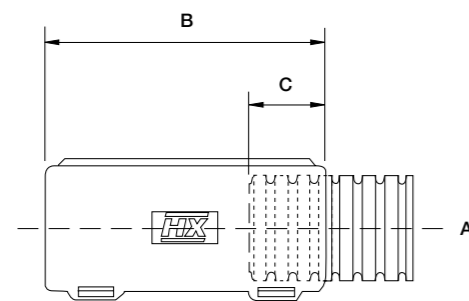

Special customised products Sumitomo hinged interface



Sumitomo
4 Way Hinged Interface
Special Customised Product

Sumitomo 4 Way Hinged Interface - Special Customised Product

Straight and 90° elbow interfaces providing high integrity connections between Sumitomo connectors and Harnessflex conduit systems. These interfaces are designed to snap together over all types of Harnessflex slit and unslit conduit, maintaining maximum conduit bore. In addition, 90° elbow versions allow the conduit to swivel 360° around the connector housing.

Part No.	Conduit Size (A)		Nominal Dimensions			
	NC	NW	B	C	D	E
CI08-SU4	08	7.5	34.4mm	31.5mm	16.1mm	12.3mm
CI08-90-SU4	08	7.5	48.2mm	34.8mm	19.3mm	7.3mm

NOTE: 180° versions are available



Approvals

CE Mark to the Low Voltage Directive

RoHS Compliant to 2011/65/EU

Conforms with **End of Life Vehicle**

directive (ELV) EU200/53/EC

IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
For use with: All conduits in the Harnessflex range			
IP40	Yes	Self Extinguishing	-40°C to +120°C
IP67	N/A	Low Smoke Toxicity	UV Resistance Very High
IP68	N/A	Halogen Free	

Dimensions

