

Special customised products DIN 72585 Hinged interface & Blanking plug



DIN 72585 Hinged Interface
Special Customised Product


DIN 72585 Hinged Interface - Special Customised Product

Circular interface to fit DIN 72585 STYLE connectors. Connector is free to swivel after interface is installed.

Part No.	Conduit Size (A)		Nominal Dimensions		
	NC	NW	B	C	D
CI08-72585	08	7.5	40.9mm	24.9mm	10mm

IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
IP40	Yes	Self Extinguishing	-40°C to +120°C
IP67	N/A	Low Smoke Toxicity	UV Resistance
IP68	N/A	Halogen Free	

Dimensions

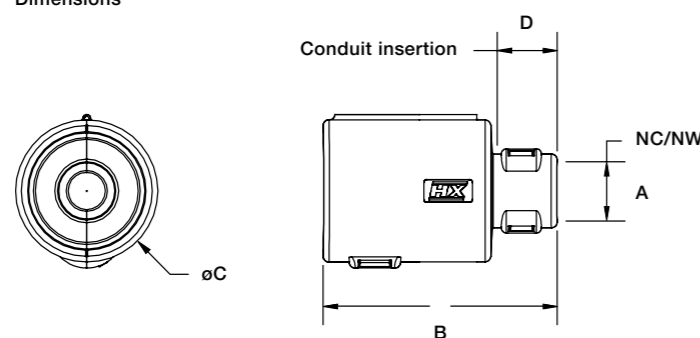


Blanking Plug
Special Customised Product

Blanking Plug - Special Customised Product

Plastic blanking plug to seal female DIN 72585 circular connectors. Prevents the ingress of water/dust, during transport or harness storage.

Part No.	Nominal Dimensions		
	A	B	C
BP72585	26.3mm	23.8mm	17.8mm

Dimensions

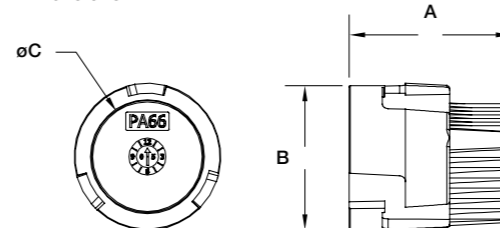

IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
IP40	Yes	Self Extinguishing	-40°C to +120°C
IP67	N/A	Low Smoke Toxicity	UV Resistance
IP68	N/A	Halogen Free	

Special customised products Interfaces for circular connectors



Interfaces for Circular Connectors
Special Customised Products

Interfaces for Circular Connectors - Special Customised Products

Interface provides connection between electrical circular connectors and hinged conduit system. Due to the innovative design, the interface can freely rotate without any harness movement.

Part No.	Shell Size	Fitting Size		Thread Size
		NC	NW	
Hinged Fitting				
NEPA14-16	14mm	16	13	13/16"-20 UNEF
NEPA16-20	16mm	20	17	15/16"-20 UNEF
NEPA24-28	24mm	28	23	17/16"-18 UNEF
CI20-CCU100	18/16mm	20	17	1"-20 UNEF
CI20-CCU119	18/16mm	20	17	13/16"-18 UNEF
CI28-CCU138	24mm	28	23	13/8"-18 UNEF

Part No.	Shell Size	Fitting Size		Nominal Dimensions			
		NC	NW	A	B	C	D
Interface for Circular Connector							
NEPA14-16	14mm	16	13	14.4mm	25.3mm	25.0mm	12.5mm
NEPA16-20	16mm	20	17	14.4mm	30.0mm	26.3mm	16.4mm
NEPA24-28	24mm	28	23	17.0mm	42.0mm	29.8mm	22.8mm
CI20-CCU100	18/16mm	20	17	11.0mm	30.0mm	26.0mm	16.4mm
CI20-CCU119	18/16mm	20	17	11.0mm	33.0mm	26.0mm	16.5mm
CI28-CCU138	24mm	28	23	13.0mm	41.5mm	30.0mm	22.8mm



Approvals

CE Mark to the Low Voltage Directive
RoHS Compliant to 2011/65/EU
Conforms with End of Life Vehicle
directive (ELV) EU200/53/EC

IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
IP40	Yes	Self Extinguishing	-40°C to +120°C
IP67	N/A	Low Smoke Toxicity	UV Resistance
IP68	N/A	Halogen Free	

Interface for circular connector configurations Hinged fittings

