

Accessories

Multi-way reducers

Multi-way Reducers

One-piece, multi-way breakout inserts providing reducing options to a variety of conduit sizes from a single hinged fitting junction. These reducers can accommodate all types of Harnessflex slit and unslit conduit and may be used with all Harnessflex hinged fittings.



Part No.	From Conduit Size		To Conduit Size (NC)					To Conduit Size (NW)			
	NC	NW	A	B	C	D	E	A	B	C	D
ST20-2x08	20	17	08	08	-	-	-	7.5	7.5	-	-
ST20-12	20	17	12	-	-	-	-	10	-	-	-
STN25-3x08	25	22	08	08	08	-	-	7.5	7.5	7.5	-
ST25-12	25	22	12	08	-	-	-	10	-	-	-
ST25-1208	25	22	12	08	-	-	-	10	7.5	-	-
ST28-4x08	28	23	08	08	08	08	-	7.5	7.5	7.5	7.5
ST30-4x08	30	26	08	08	08	-	-	7.5	7.5	7.5	7.5
ST32-12-4x08	32	29	12	08	08	08	08	7.5	7.5	7.5	7.5



Approvals	IP Rating	Appropriate Conduit	Fire Performance	Temperature Range
CE Mark to the Low Voltage Directive	For use with: All conduits in the Harnessflex range		Self Extinguishing	-40°C to +120°C
RoHS Compliant to 2011/65/EU		IP40	Yes	Low Smoke Toxicity
Conforms with End of Life Vehicle directive (ELV) EU200/53/EC		IP67	N/A	Halogen Free
	IP68	N/A		UV Resistance Very High

Multi-way reducer configurations

Hinged fittings

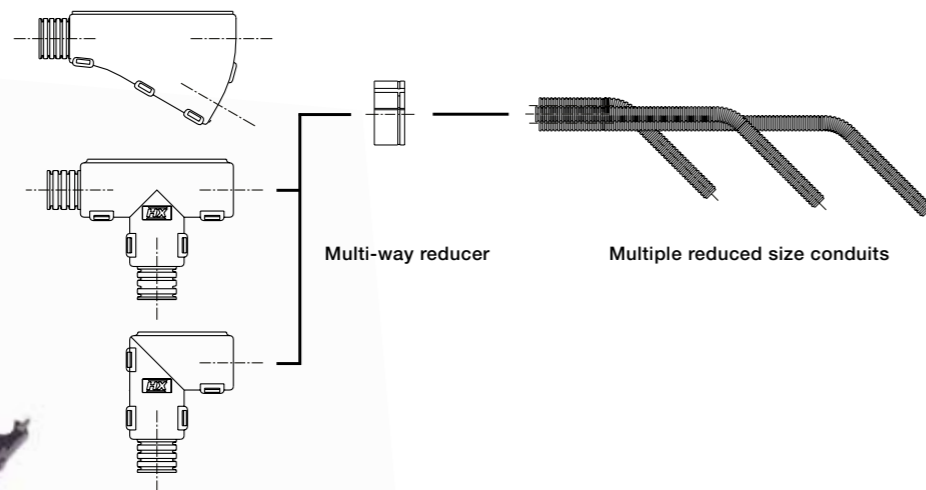

1 Split external design

Unrestricted bore and quick assembly no tools required.

2 Multiple Configuration options

Provides the right conduit and outlet position option.

Accessories

Blanking caps



Blanking Cap
Accessories

Blanking Caps

Part No.	Conduit Size	
	NC	NW
BPST08	08	7.5
BCH12	08	7.5
BCH20	20	17

Dimensions

