



AP(R,L)-05-50-RL – AP(R,L)-12-50-RL

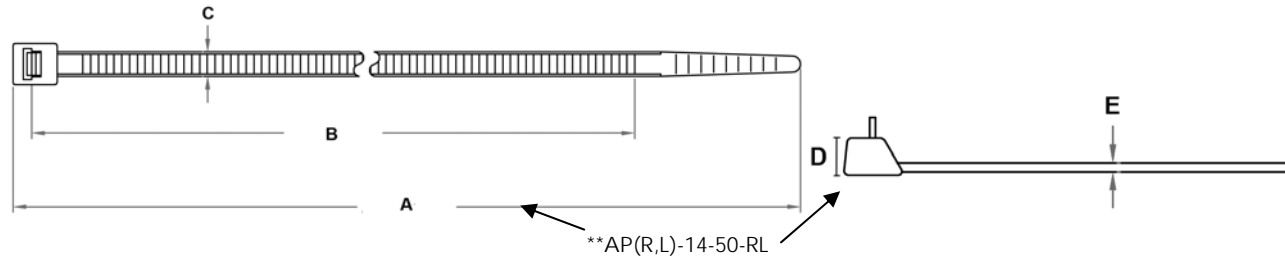

ADVANCED CABLE TIES PART NUMBER	BUNDLE DIAMETER		A IN (mm)	B IN (mm)	C IN (mm)	D IN (mm)	E IN (mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 MH FLAMABILITY RATING	
	MIN IN (mm)	MAX IN (mm)								
AP(R,L)-05-50-RL-9	.230 (6.0mm)	1.250 (32.0mm)	5.906 (150.000mm) +/- .138 (3.500mm)	5.236 (133.500mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
AP(R,L)-05-50-RL-0	.230 (6.0mm)	1.250 (32.0mm)	5.906 (150.000mm) +/- .138 (3.500mm)	5.236 (133.500mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
AP(R,L)-08-50-RL-9	.230 (6.0mm)	1.81 (46.0mm)	7.990 (203.000mm) +/- .098 (2.500mm)	7.244 (184.000mm) +/- .059 (1.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
AP(R,L)-08-50-RL-0	.230 (6.0mm)	1.81 (46.0mm)	7.990 (203.000mm) +/- .098 (2.500mm)	7.244 (184.000mm) +/- .059 (1.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
AP(R,L)-12-50-RL-9	.230 (6.0mm)	2.87 (73.0mm)	11.930 (303.000mm) +/- .098 (2.500mm)	11.142 (283.000mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
AP(R,L)-12-50-RL-0	.230 (6.0mm)	2.87 (73.0mm)	11.930 (303.000mm) +/- .098 (2.500mm)	11.142 (283.000mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307(7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2	
**AP(R,L)-14-50-RL-9	<b>MAX</b> 4.000 (102.0mm)		14.488 (368mm) +/- .098 (2.500mm)	13.307 (338.000mm) +/- .098 (2.500mm)	.189 (4.800mm) +/- .012 (.300mm)	.201 (5.100mm) +/- .014 (.360mm)	.063 (1.600mm) +/- .010 (.250mm)	50 (222)	V-2	
**AP(R,L)-14-50-RL-0	<b>MAX</b> 4.000 (102.0mm)		14.488 (368mm) +/- .098 (2.500mm)	13.307 (338.000mm) +/- .098 (2.500mm)	.189 (4.800mm) +/- .012 (.300mm)	.201 (5.100mm) +/- .014 (.360mm)	.063 (1.600mm) +/- .010 (.250mm)	50 (222)	V-2	
										
						<b>ADVANCED CABLE TIES – 50 LB. (222n) RELEASABLE CABLE TIES</b>				
						<b>COLOR DESIGNATIONS:</b>		<b>MATERIAL:</b>		
						0 = UV BLACK 9 = NATURAL		<b>NYLON 6/6 POLYAMIDE</b>		
						SHEET 1 OF 1	<b>REV.: A</b>		DRAWING NO.: RL-A	
A	12/22/14	JA	KT	KT	INITIAL RELEASE		DRAWN BY	DATE	CHECK	SCALE
REV	DATE	BY	CHK	APPROVE	DESCRIPTION		JA	12/22/14	KT	NONE
<b>CONFIDENTIAL PROPERTY OF ADVANCED CABLE TIES, INC.</b> <b>THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF ADVANCED CABLE TIES, INC.</b>										