


D 275232

PART NO.	IDENTIFICATION				REF. BODY COLOR	REF. TRACER COLOR	CODE (SEE NOTES)		MAKE FROM PART NO.	DATE	LET.	REVISION	BY	CHK	APPROVALS
	A	B	C	D			CODE	SPACE							
275232-01	106.500-104.500	.44	.25	6.750 5.750	WHT		D-20	328636-01	10/19/71	D	275232-01 DIM. A WAS 2.50 & WAS 2.50 & 1.06 (REVISION)	J.G.			
275232-02	106.500-104.500	.44	.25	6.750 5.750	WHT		E-20	328636-01							

ENG. APPR.	ENG. APPR.	ENG. APPR.	ENG. APPR.	APPROVED
				ERK
				10-20-71

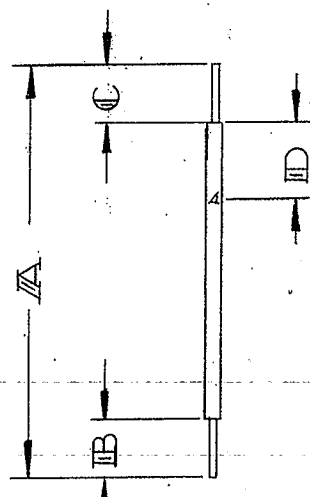

<b>Revere</b> CORPORATION OF AMERICA WALLINGFORD, CONNECTICUT <small>A SUBSIDIARY OF HUBBARD INTERNATIONAL CORPORATION.</small>	LEAD WIRE #20 GAGE CUT LENGTHS	DRAWING NUMBER -275232
DRAWN: RVS CHECKED: RVS 10-19-71	ENG. APPR.: PAP 10-19-71	APPROVED: ERK 10-20-71
UNLESS OTHERWISE SPECIFIED BREAK SHARP EDGES .005-.010 APPROX. SURFACE FINISH PER ANSI B46.1 SURFACE TREATMENT ALLOWABLE TOLERANCES FRACTIONS DECIMALS ANGLES 2 PL ± .03 STOCK THICKNESS COMMERCIAL AND 10387 3 PL ± .005 ± 1° STOCK SIZE HEAT TREAT	NEXT ASSY. APPLICATION ?	DIMENSIONING PER ANSI Y14.5 WEIGHT
MATERIAL SPEC.	FINISH SPEC.	THREADS PER INCH PER ANSI B1.13-28 AND MIL-STD-8 SCALE CODE IDENT. NO. 50625 SIZE B DRAWING NUMBER -275232
NOTES: 1. ENTIRE LENGTH OF WIRE TO BE STAMPED WITH CODE AS SPECIFIED IN TABLE. 2. CODE IN ACCORDANCE WITH SPEC. MIL-W-5088. REF: WIRE PER MIL-W-22759/13		CONTRACT NO. DO NOT SCALE DWG.