Astro Shaped 3/8 #329074

442918

D.A.

C 442918

| REVERE P/N | A | B | IDENT CODE | BODY COLOR | MAKE FROM |
|---|---|---|---|---|---|
| 442918-01 | | | 1 | | 329774-00 |
| -02 | | | 2 | | -00 |
| -03 | | | 3 | | -01 |
| -04 | | | 4 | | -01 |
| -05 | 1.00 | 2.00 | 5 | WHITE | -01 |
| -06 | .50 | 1.50 | 6 | | -01 |
| -07 | | | 7 | | -01 |
| -08 | | | 8 | | -01 |
| 442918-09 | | | 9 | | 329774-01 |

14-20-9

14-16-9

| DATE | LET | REVISION | BY | CHK | APPROVALS |
|---|---|---|---|---|---|
| 80-02-25 | A | 2.000-1.500 WAS 3.000-2.000 | DJH | RS | MAC . . PAP |
| 87-01-21 | B | UPDATED PART NOS. | TJ | BM | MAC ES SLIR PAP |
| 93-03-19 | C | ECR-14268 | MM | MAC | DSC MWL DVR DSC |

NOTES: 1.50" → 2.00"

1. PERMANENTLY MARK IDENTIFICATION CODE IN AREAS AS INDICATED ON P/D IN BLACK CHARACTERS, PER MIL-STD-681, SYSTEM IV. THE CHARACTERS SHALL BE LEGIBLE AND PERMANENT AND THE METHOD OF IDENTIFICATION SHALL NOT IMPAIR THE CHARACTERISTICS OF THE WIRING. HOT STAMP MARKING OF WIRE SHALL NOT BE USED UNLESS OTHER MARKING METHODS ARE NOT COMPATIBLE WITH WIRE INSULATION.

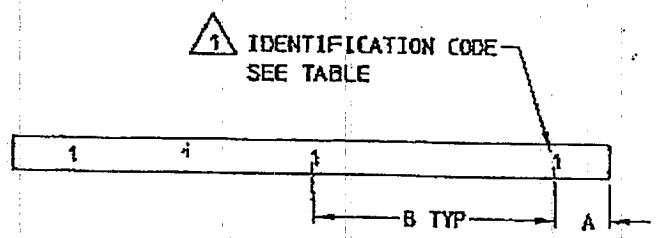


THIS COPY OF THIS DRAWING WILL NOT BE KEPT UP TO DATE


PROPRIETARY

THIS DRAWING CONTAINS PROPRIETARY INFORMATION WHICH SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DRAWINGS OR DISCLOSED TO OTHERS OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE WITHOUT WRITTEN PERMISSION OF REVERE AEROSPACE, INC. WHERE RELATED TO A UNITED STATES GOVERNMENT CONTRACT, SUCH INFORMATION MAY BE DISCLOSED AS PROVIDED IN SUCH CONTRACT AND MAY BE USED BY THE UNITED STATES GOVERNMENT FOR MAINTENANCE, SERVICING AND REPAIR PURPOSES OR AS OTHERWISE PROVIDED BY SUCH PRIOR WRITTEN PERMISSION.


| - | | | PART OR IDENTIFYING NO. | ITEM | DESCRIPTION | REMARKS |
|---|---|---|---|---|---|---|
| QTY. REQD/DASH NO. | | | LIST OF MATERIALS | | | |

| DRAWN | CHECKED | ENG APPR | ENG APPR | APPROVED | APPROVED |
|---|---|---|---|---|---|
| RZ | RS | PAP | - | - | PAP |
| 78-02-01 | 78-02-02 | 78-02-02 | - | - | 78-02-02 |

THIRD ANGLE PROJECTION — INCH [mm]

REVERE AEROSPACE WALLINGFORD, CONNECTICUT

UNLESS OTHERWISE SPECIFIED

INCHES: 2 PL DEC ±.03, 3 PL DEC ±.005 | MILLIMETERS: 1 PL DEC ±0.8, 2 PL DEC ±0.13 | BREAK SHARP EDGES IN .03 | ANGLES ± 2°

SPECIFICATIONS ARE TO LATEST REVISION

443298-XX | 442700-02

HEAT TREAT

ALL DIMENSIONS APPLICABLE AFTER SURFACE TREATMENT

NEXT ASSY | USED ON

APPLICATION

SURFACE ROUGHNESS per ANSI B46.1

THREADS PER HANDBOOK H-28 AND MIL STD 8

DIMENSIONING & TOLERANCING per ANSI Y14.5M 1982

WEIGHT

MATERIAL SPEC.: SEE TABLE

FINISH SPEC

DO NOT SCALE DWG

CONTRACT No

WIRE-LEAD FLUOROPOLYMER INSULATED FEP, $PVF_2$, LIGHT WEIGHT, Sn COATED Cu CONDUCTOR, 600V

| CODE IDENT. No. | SIZE | DRAWING NUMBER |
|---|---|---|
| 50625 | B | 442918 |

SCALE: NONE

SHEET 1 OF 1