


41042-1

NOTES:
1. INDIVIDUAL WIRES DO NOT
NEED TO BE STRIPPED.

REV.	ECD NO.	REVISION DESCRIPTION	BY/DATE	APPD./DATE
1	4482	COLOR WAS YELLOW, ADDED SJEOW-A & SJEOW-A TO DWG	JLG 1/2/98	
2	14284	DIM 1.5" WAS 4"	MS 10/20/00	JW 12/4/00

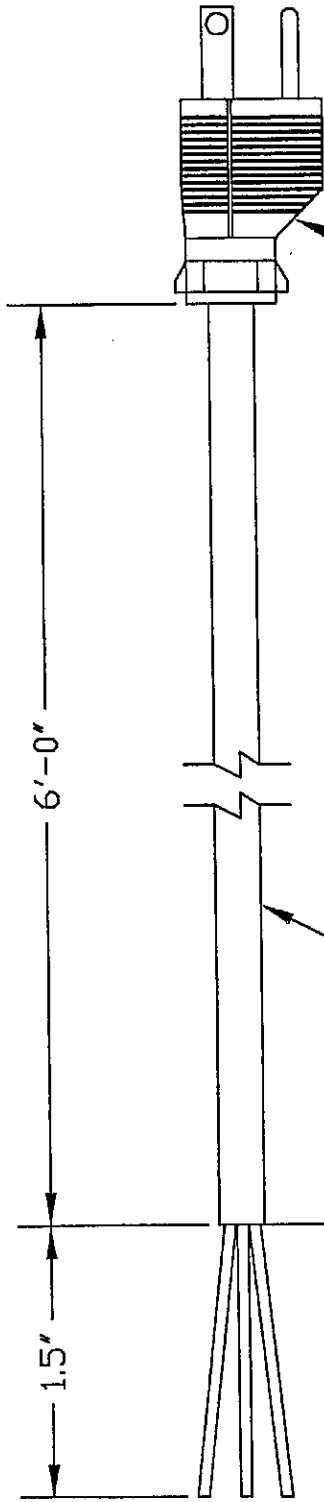

SJOW-A OR SJEOW-A OR
SJEOW-A OR SJEOW-A
14/3 BLACK CABLE

15A PLUG



MATERIAL:
FINISH:
PART NO.:

This drawing and the information shown is unpublished confidential property of Insul-8 Corporation. Subject to recall, and is loaned for use only in connection with the authorized manufacture or installation of Insul-8 Corp. products, and on the condition that it will be treated as confidential and will not be disclosed, published or reproduced in whole or in part, or diverted to other uses, without specific written permission.

ITEM	PART NO.	DESCRIPTION	BILL OF MATERIAL	PROJCT	SALES NO.	QTY.
				1200 PR		1
DRAWING TITLE:				FEEDER CORD, 14/03 300V, BLACK, 15A PLUG		
107 Industrial Parkway Hartford, VA 5537		1002 F Street Drexel, NE 68027-1001		ENGINEER: J. GOODALE	SCALE: NTS	SHEET: 1 OF 1
INSUL 8 CONDUCTIVE DIVISION RELACHUR GROUP		INSUL 8 CONDUCTIVE DIVISION RELACHUR GROUP		DRAWN: R. TURK	DWG. PART NO.	REV: 2
DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:		CHECKED: J. GOODALE	SIZE: A	41042
DECIMAL ANGLE FRACTIONS		DECIMAL ANGLE FRACTIONS		APPROVED: J. GOODALE	11/11/97	
.X = ±.050		.X = ±.050				
.XX = ±.030		.XX = ±.030				
.XXX = ±.010		.XXX = ±.010				
MINIMUM MACHINE SURFACE		MINIMUM MACHINE SURFACE				
250/		250/				