


Contact numbering / 芯针排列
From solder side / 从焊接端看

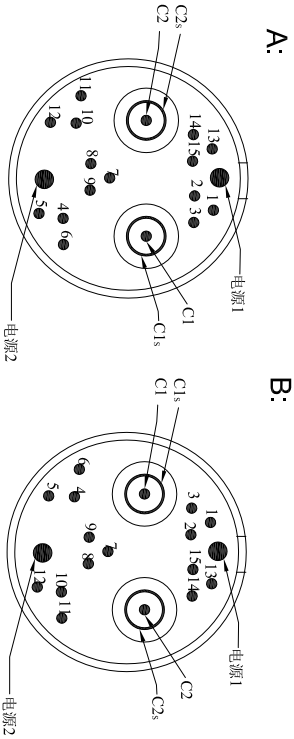

- Note/注
- Tolerance on length
长度公差
±20mm up to 0.95m
0.95m以内 ±20mm
±2% from 1.0m
超过1m ±2%
 - Label/标签
LM.SA649.A
Work.No.

- Requirement/技术要求:
- ① 装配参照K系列加工指导
 - ② LEMO标准线缆组件测试
 - ③ 木轴包装

6	BRF.5K.200.NAS	1	LEMO 防尘帽
5	PHG.5K.877.CLIC155	1	LEMO 插座
4	KC.CABLE.0001	100m	客户线缆(Belden 9171)
3	LD.LABEL.0002	1	标签
2	FGG.5K.877.CLAC155	1	LEMO 插头
1	BFG.5K.100.NAS	1	LEMO 防尘帽
TITLE		Qty	Description
线缆组件			
SCALE		Draw.	Astro 11-Sep-2014
SHEET		Appr.	Leo 11-Sep-2014
1/2		Rev.	1.0 11-Sep-2014
Cus. DWG:		HD-装配	



LEMO Electronics
(Sole distributor in China)
Tel: (+86 21) 59897721
www.lemo-china.com

DWG NO.
LM.SA649.A

Connection Designation / 接线表	
A	B
FGG. 5K. 877插头	FIG. 5K. 877插座
C1	C1
C1s	C1s
C2	C2
C2s	C2s
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
电源1	电源1
电源2	电源2

TITLE	线缆组件
Cus. DWG:	—
SCALE	—
SHIELD	2/2
Draw.	Astro
Appr.	Leo
Rev.	1.0
DWG NO.	LM.SA649.A
HD-装配	
11-Sep-2014	
11-Sep-2014	
11-Sep-2014	

