


**Tooling NO.**

SCREW TOOLING: 982033  
DB15 TOOLING: A991623

**REVISIONS**

DATE	LTR	DESCRIPTION	APPRO.
2004/05/05	A	New Drawing	-

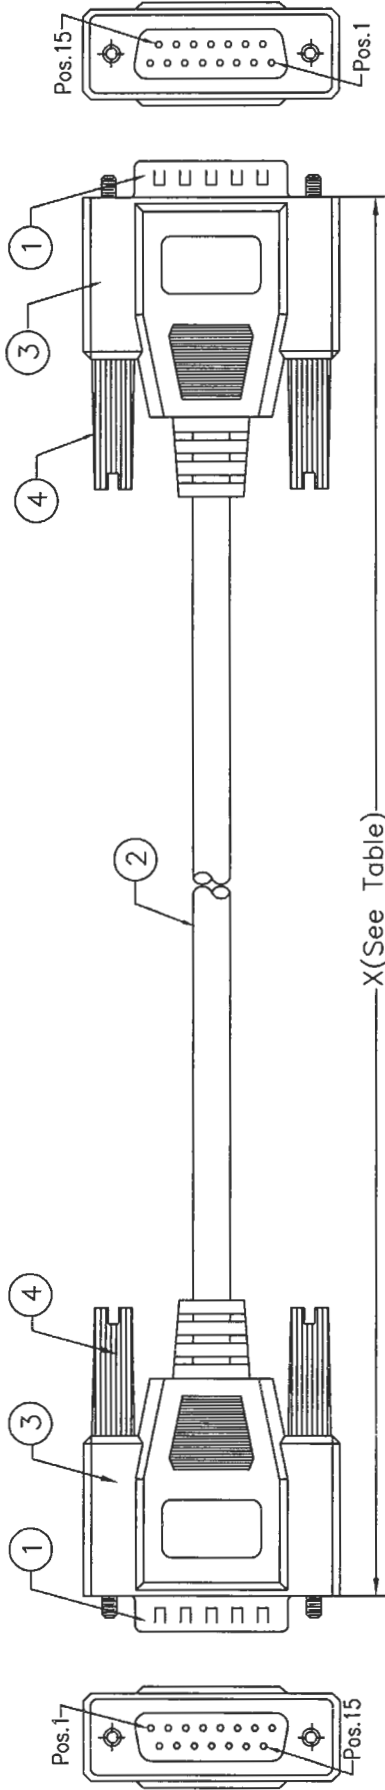

X(See Table)

**PIN ASSIGNMENT :**

DB15 M.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Shell
DB15 M.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Shell

**Table:**

PART NO	ITEM NO	LENGTH
SR150611	1150060M-01	1830±30
SR151011	150100M-01	3048±30

ITEM	QTY	U/M	PART NO.	DESCRIPTION	UNLESS OTHERWISE SPECIFIED		TITLE		REV.				
					TOLERANCE :	ANGLES :	SIZE	UNIT		PART NO.	REV.		
4	4	EA	MS04404040465NIP0001	#4-40 4*46.5 Thumbscrew,Molded Color:Beige(BG01)	X: ±0.2	ANGLES : ±2°	A	MM	SR15XX11	A			
3	1	KG	DVINO40BG001	Molded PVC Color: Beige(BG01)	X.X: ±0.1	DO NOT SCALE DRAWING			THIRD ANGLE PROJECTION	1			
2	1	EA	WNOUL28BG15CD0000XM01	Non-UL 28AWG*15C AL/Foil+Drain Jacket color: Beige(BG01)	X.XX: ±0.05				SCALE 1:1	1			
1	2	EA	CDSUB015MBKNIT0000002	DB15 Male Contact: Gold Flash Shell:Nickel Plated Insulation: Black Color						1			
ITEM/QTY/U/M				PART NO.	DESCRIPTION	DWG NO.	GSR15XX11			ITEM NO.	K0404115XXXXM-01	DATE	05/05/2004