


MALE END VIEW



- 1 = BROWN
- 2 = WHITE
- 3 = BLUE
- 4 = BLACK
- 5 = N/C




**ACCEPTED**

NAME *Vu Nguyen*

SIGNATURE *Vu Nguyen*

DATE 10/19/10

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PUR
MOLDED HEAD MATERIAL/COLOR	THERMOPLASTIC PUR/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PUR/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x26 AWG
DRAIN/SHIELD	26 AWG DRAIN/FOIL AND BRAIDED SHIELD
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1, 3, 4, 6P AND IEC IP68

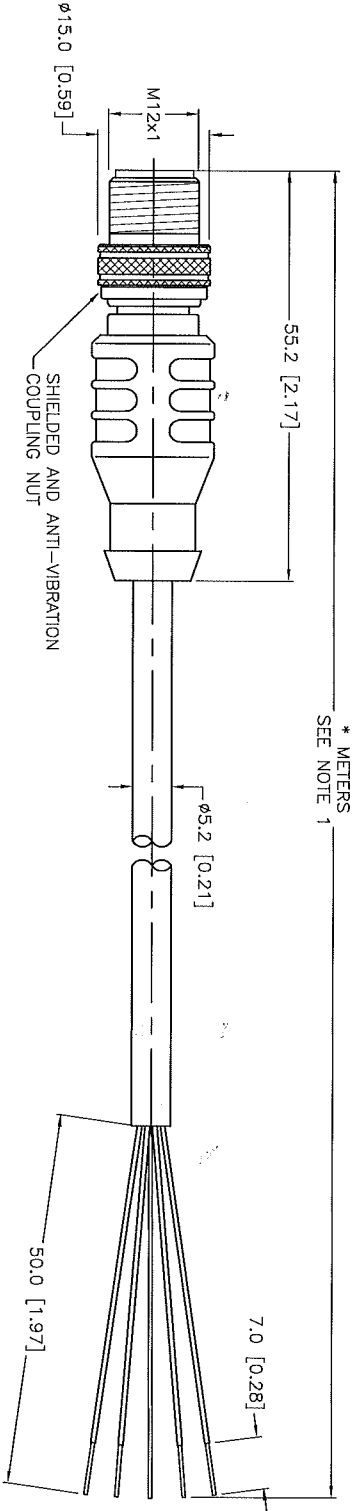

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED OR TINNED.

3. "/CS..." DESIGNATES CUSTOM WIRING.

**NOTE**  
**PRELIMINARY SPECIFICATIONS**

**SOURCE DRAWING - FOR REFERENCE ONLY**

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<b>TURCK INC</b> <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 593-7300 (763) 553-0708 fax turck.com
MATERIAL	SEE SPECIFICATIONS	DRAFT RDS DATE 10/19/10 DSGN SCALE 1=1.0	

REV P1	DESCRIPTION	BY RDS	DATE 10/19/10	ECO NO.	FINISH	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	DESCRIPTION	IDENTIFICATION NO.	REV
					SEE SPECIFICATIONS	CONTRACT TURCK FOR MORE INFORMATION	CONTRACT TURCK FOR MORE INFORMATION	MILLIMETER [ INCH ]	RSSW 4.5T-* /CS...	PENDING	P1
								DO NOT SCALE THIS DRAWING	FILE: 11514_RSSW 4.5T_CS		SHEET 1 OF 1