



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

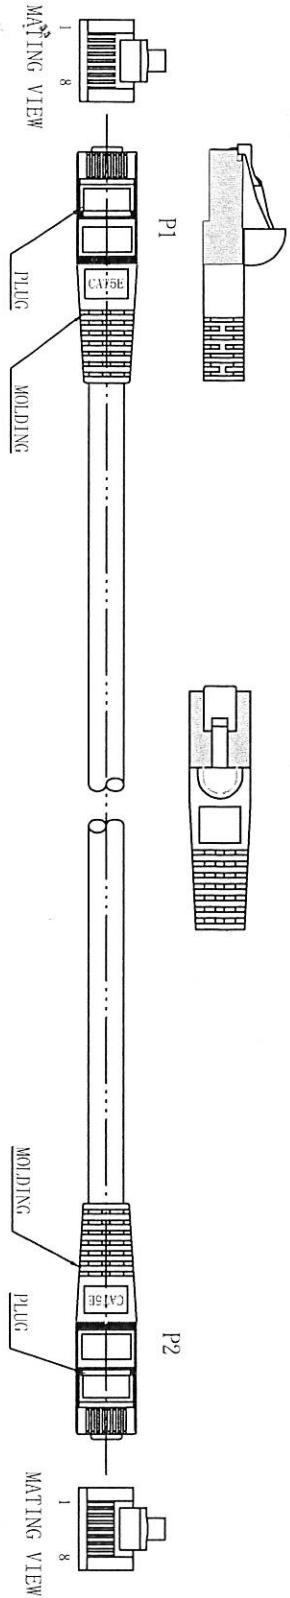

marking: YFC FTP CAT.5E 350MHZ PATCH ISO/IEC 11801 & EN 50288 3P CONFORMS FOR GIGABIT (LP518) ETHERNET ▲ 26AWGX4P TYPE CMX(UL) C(UL) CMH E164469-F3

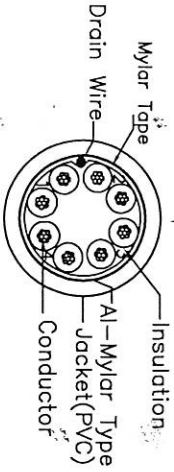

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	Bare Copper 26AWG
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 0.85±0.06mm
Jacket	PVC Thickness: MIN at any point: 0.50mm MAX AVG: 0.60mm Diameter: 5.6±0.2mm

Wire	CAT. 5E FTP STR 26AWG*4P
Plug	YUS-04 8P8C 50U"
xx=Length	XXM
yy=Color	YY

PA/R	PINOUT	
	P1 (T568B)	P2 (T568B)
2	1 WHT/ORG	1 WHT/ORG
3	2 WHT/GRN	2 WHT/GRN
1	3 GRN	3 GRN
4	4 BLU	4 BLU
	5 WHT/BLU	5 WHT/BLU
	6 WHT/BRN	6 WHT/BRN
	7 BRN	7 BRN
	8 Shielded	8 Shielded

DRAWN BY: Dengfen		DATE: 2012/08/31		DESCRIPTION: CAT. 5E FTP STR 26AWG*4P	
CHECKED BY:		SHEET 1 of 1		ITEM NO. 1006XXXX	
APPROVED BY		SCALE		REV. 00	
				UNIT: mm	