
Page 1 of 1 Search Results



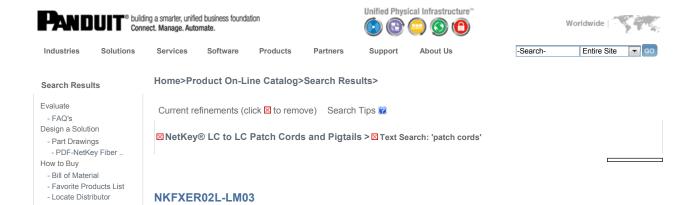

- Compliant with TIA/EIA 568-C.3-1 and ISO/IEC 11801, IEC-61754-7 (international), TIA-604-5 (FOCIS-5), UL 1666 (OFNR) flame rating and IEC-60332 (LSZH) flame rating
- Patch cords and pigtails include OM3 fiber or OM1, OM2, or OS1 fiber in 900µm tight-buffered fiber, 1.6mm or 1.8mm or 3 mm duplex jacketed cable
- 100% performance tested assures that patch cords and pigtails are standard compliant
- Q.C. identification label provides lifetime traceability
- * Additional lengths and availability: Patch cords are available in 1, 2, 3, 5 and 10 meter lengths. To order lengths other than 1 meter; replace the 1 after the M with the desired available length. Pigtails are available in 1, 2 and 3 meter lengths only. To order lengths other than 1 meter, replace the 1 after the M with the desired available length.

Part Number	NKFXER02L-LM03
RoHS Compliancy Status	RoHS directive is not applicable
Part Description	NetKey® LC to LC patch cord, OM3, riser, duplex (1.6 mm jacket)
Length (m)	3
Connector 1 Type	LC Connector
Connector 2 Type	LC Connector
Flammability Rating	Riser (OFNR)
 Pricing Description 	NetKey LC-LC Patch Cord, OM3, Riser, Duplex (1.6 mm jacket)
Min. Order UOM	PC
Min. Order Qty.	1
BOM Qty. (# of Pkgs.)	0
Add to Favorite Product List	

Please register to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.

Home | Industries | Solutions | Services | Products | Partners | Support | Contact Us | Site Map | Careers Copyright © 1995-2012, PANDUIT CORP. All rights reserved. | Legal Information | Privacy Policy