


TABLE:

Part Number	Length	Contact Resistanc
AV-SVGAMM-003	3FT	2
AV-SVGAMM-006	6FT	2
AV-SVGAMM-010	10FT	3
AV-SVGAMM-015	15FT	3
AV-SVGAMM-025	25FT	5
AV-SVGAMM-050	50FT	10
AV-SVGAMM-075	75FT	10
AV-SVGAMM-100	100FT	10

PIN Assignment

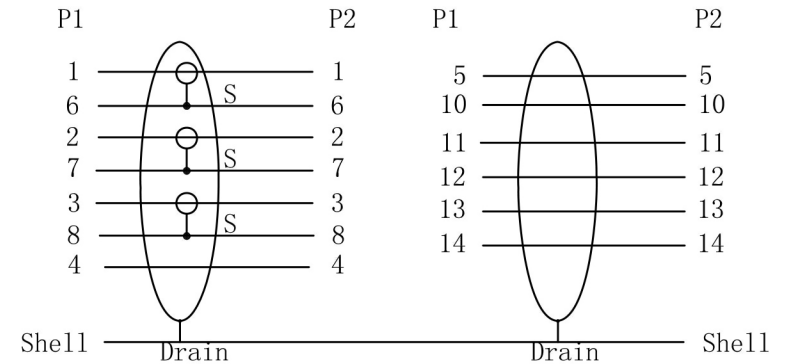

ELECTRICLE TEST:

- (1) 100% OPEN SHORT & MIS WIRE TEST.
- (2) CONTACT RESISTANCE \* ohm Max .
- (3) INSULATION RESISTANCE 10M ohm Min .
- (4) HI-POT TEST:DC 300V/10ms

10	A10-R075073	φ 1.5 TUBE 22mm*2pcs	0.044	M
9	A10-R075002	φ 1.0 TUBE 10mm*6pcs	0.06	M
8	A10-R075005	φ 2.5 TUBE 10mm*6pcs	0.06	M
7	A6-0000055	Transparent PVC dust cover	2	pcs
6	A10-R41033	CORE:28.5*17.5*9.5MM	2	pcs
5	A5-R047001	45P BLACK PVC	40	g
4	A5-R047011	TRANSPARENT PE	10	g
3	A7-R040002	SCREW:#4-40UNC 4*47MM Nickel Plated	4	pcs
2	A2-R023026	HDB15P Male Solder Type, Shell Nickel Plated, Black Insulation, PIN G/F	2	pcs
1	A4-R003375	UL2919 [28AWG*1C+S(30/0.10TC)+jacket]*3+24AWG(7/0.2TC)*7C+EA OD:8.0MM BLACK Marking:E342987 兄 AWM STYLE 2919 80°C 30V VW-1 LOW VOLTAGE COMPUTER CABLE	0.915	M
NO	ITEM	DESCRIPTION	Q'TY	UNIT

TOLERANCE			
INCHES M/M			
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY		CUSTOMER :	
CHECK BY		CUSTOMER P/N :	
APPD BY		SCALE	NONE
		UNIT	MM
		DATE	2013.04.30
		REV.	A
			1/2