


14/3 Type SJOOW Black

This cable is suitable for control equipment on machine tools subjected to medium mechanical stresses; for fixed or flexible installation, where free movement is required without tensile stresses and without forced guidance systems; and in dry, damp and wet interiors — including water-oil mixtures — but not outdoors.

Part Number SJ014030W-0/90C

CONSTRUCTION

Conductor	Flexible bare conductors, Class K strand, 41/30
Insulation	EPDM, oil resistant
Fillers	Jute
Insulation Color	Black, white, green
Conductor Size	14 AWG
Avg. Insulation Thickness	0.030"
Jacket Thickness	0.030"
Overall Dia.	0.370"
Cable Weight	105 lbs/MFT
Jacket	CPE, oil resistant
Jacket Colour	Black
Approvals	UL Flexible Cord, Subject 62 CSA Flexible Cord, C22.2.49 MSHA Approved RoHS Compliant
Print Legend	ASCENT #6226 E486041 14 AWG 3/C SJOOW (UL) 300V (-40 - 90c)--CSA LL268042 FT-2 WATER RESISTANT P-07KA140001-MSHA--RoHS xxxxx FT

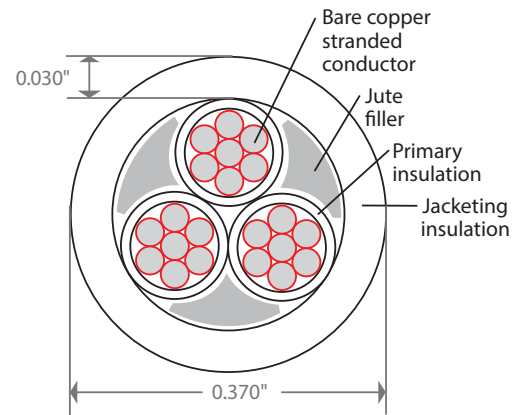

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C)	-40°C to 90°C
Operating Voltage (V)	600V
Flame Test	FT2, CSA



Application: Machine tools, power tools, portable machinery, submersible pumps, motor leads

All trademarks are property of their respective owners. All specifications are subject to change.

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Shanghai | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

Date	Rev	Description	By
2018/05/10	0	Spec created	JJM