


18/2 SJOOW, Black

Suitable for machine tools, power tools, portable machinery, submersible pumps, and motor leads

Part Number SJ018020W-0/90C

CONSTRUCTION

Conductor	Bare copper, stranded 16/30
Conductor Size	18 AWG, 2 conductors
Insulation	EPDM, black, white
Insulation Thickness	0.030"
Filler	PP fiber
Separator	Optional
Jacket Material	CPE
Jacket Color	Black
Jacket Thickness	0.030"
Cable O.D.	0.285"
Print Legend	Ascent E477982 18 AWG 2/C SJOOW (UL) 300V (-40 - 90c)--CSA LL268042 FT-2 WATER RESISTANT P-07KA140001-MSHA--RoHS xxxxx FT
Approvals	UL flexible cord, UL Subject 62; CSA Flexible Cord, C22.2-49; MSHA approved, RoHS Compliant

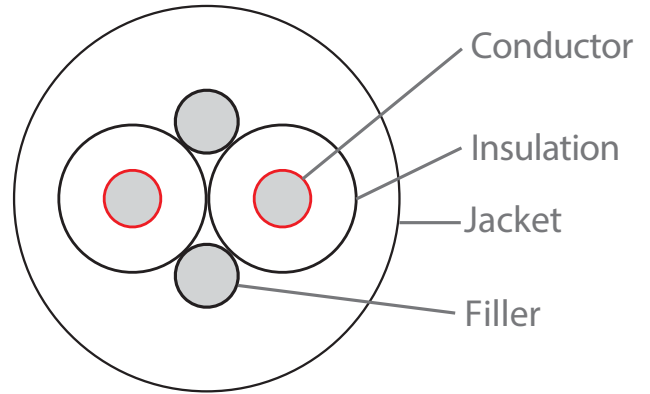

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C)	-40 to 90° C
Operating Voltage	300 V



Application: Machine tools, power tools, portable machinery, submersible pumps, motor leads

All trademarks are property of their respective owners. All specifications are subject to change.

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

Date	Rev	Description	By
2018/06/08	0	Spec created	JJM