

UL CMR 20AWG/2C, Gray



PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.
Cable is suitable for installation in Canada under Section 60 of CEC, Part I.
Internal wiring or external interconnection of electronic equipment.


Design Number 10383
Part Number 32130990
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 20AWG(7/28)
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.016"(Nom.)
Insulation Diameter: 0.067"(Nom.)
Cable Lay Length: 2.00"(Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.025"(Nom.)
Overall Diameter: 0.184"(Nom.)
Jacket Color: Gray

Print Legend (Footage Markers):

ASCENT E478021 20AWG 2C 75C C(UL)US TYPE CMR SUN RES
"ROHS COMPLIANT" MADE IN USA

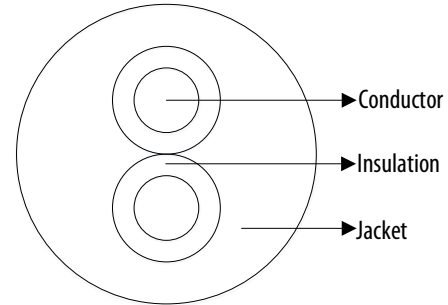

Color Code: Black, Red

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Weight: 18 Lbs/Mft

SAFETY CHARACTERISTICS

Approvals: C(UL)US listed as CMR per UL standard 444 and per CSA C22.2 No. 214-17

Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive, RoHS 3 2015/863/EU Directive

Cable is REACH compliant per Regulation (EC) No 1907/2006 (235) Updated June 14, 2023

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/09/07	Initial Release
01	2020/09/27	CMG to CMR
02	2024/04/10	Remove FT-4 from print legend according to UL 444 Fourth Edition
Created	L. Jian	Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany

Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK

Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

