

# BrightEye 55

## Genlockable Sync Generator and Test Signal Generator

BrightEye 55 is a genlockable sync generator and test signal generator that can be used as either a slave or master reference generator. It can lock to house reference or it can lock to its own internal precision standard. BrightEye 55 is well suited for remote trucks, desktop and fly packs.

Color black, bars, crosshatch, multiburst, and SDI checkfield (pathological) are just some of the signals simultaneously available on the SDI and analog composite outputs.


An ID slate with user programmable text can overlay the test pattern. The cyclops feature adds a motion element to the video test signal, handy for live applications.

The Tri-Level Sync output provides reference to high definition equipment, such as VTRs, disc recorders and workstations. There are a wide variety of user selectable formats including: 720p, 1080i, 1080sF, and 1080p. Format selections and other controls are accessed through BrightEye Mac or PC software.

AES3id digital audio, analog audio and embedded audio reference outputs are provided.

### Features

- Master or slave reference generator for all video and audio gear
- Sync pulse generator
- Test signal generator
- Composite, SD SDI, HD Tri-Level outputs
- Audio outputs

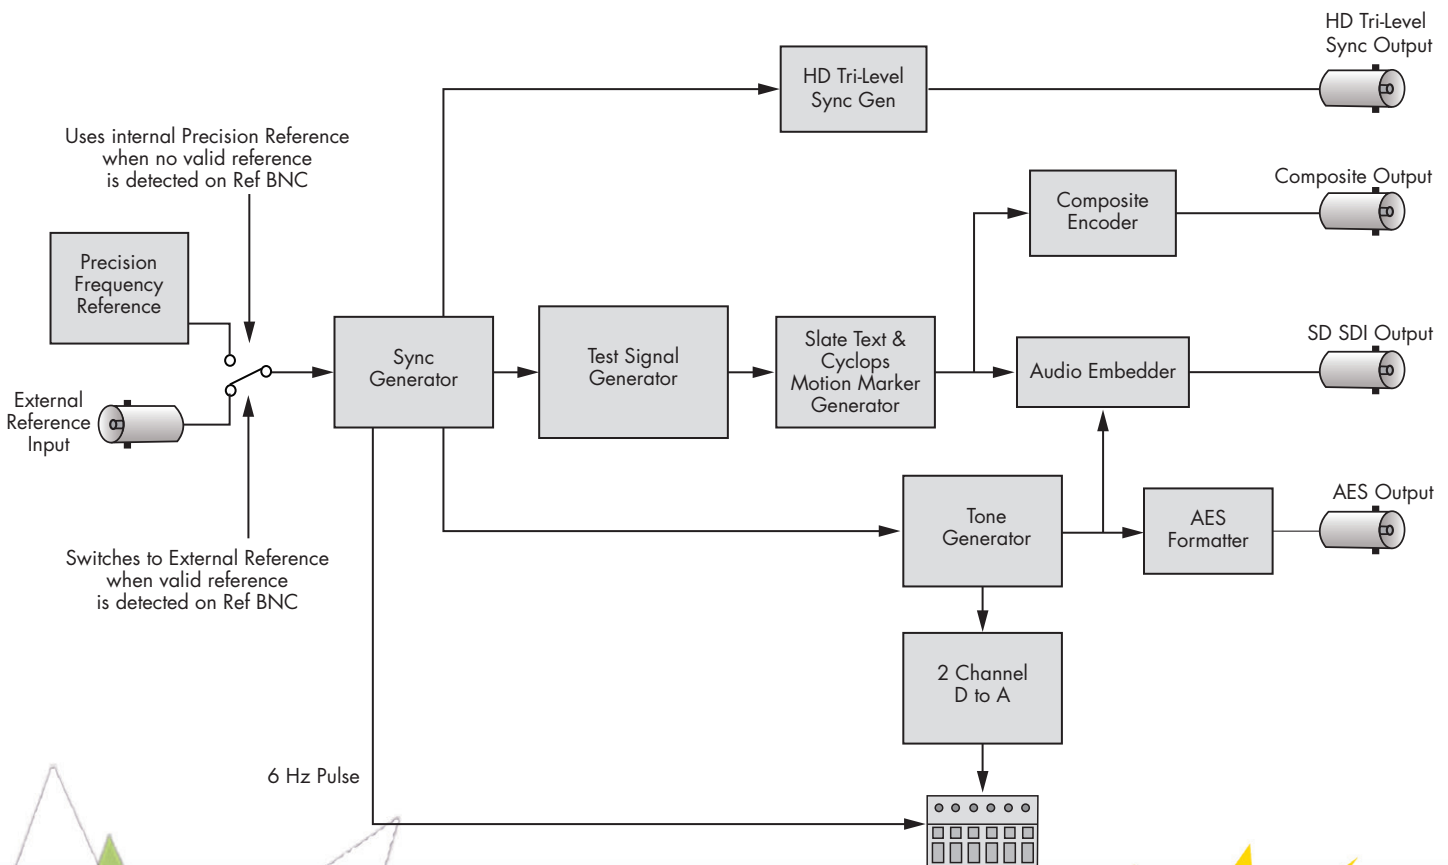

## Genlockable Sync Generator and Test Signal Generator

### Reference Input

Number	One
Signal Type	1 V P-P Composite Video PAL or NTSC
Return Loss	>40 dB DC to 5.5 MHz

### Composite Output

Number	One
Signal Type	NTSC/PAL
Impedance	75 Ω
Return Loss	>40 dB DC to 5.5 MHz
Frequency Response	-0.1 dB 10 KHz to 5.0 MHz
Output DC	±50 mV
K Factor	<1.0%
Differential Phase	<1.0 degree
SCH Phase	±5 degrees

### Accuracy and Timing Stability

Internal TCXO	
PAL Fsc	4.43361875 MHz +/- 1 Hz
NTSC Fsc	3.579545 MHz +/- 1 Hz
601 Fs	27.000000 MHz +/- 5 Hz
Long Term Drift	<1 ppm/year
Analog Jitter	<1 ns
Digital Jitter	<0.2 UI (0.13 UI typical)

### Serial Digital Output

Number	One
Signal Type	Serial Digital (SMPTE 259M)
Return Loss	>15 dB, DC to 270 MHz

### Tri-Level Sync Output

Number	One, 75 Ω
Type	1080i (SMPTE 274M -5, 6) 50, 59.94, 60 Hz 720p (SMPTE 296M -2, 3) 50, 59.94, 60 Hz 1080p (SMPTE 274M -9, 11) 23.98, 24, 25 Hz 1080sF (RP211 -14, 16) 23.98, 24, 25 Hz
Output DC	±50 mV
Return Loss	>30 dB to 30 MHz

### AES Audio Output

Number	One
Type	AES3id, 1 KHz tone
Resolution	24 bit

### Analog Audio Output

Number	One stereo pair or two mono
Type	1 KHz tone
Impedance	30 Ω, balanced
Reference Level	-10 to +4 dBu, adjustable

### General Specifications

Size	5.63" W x 0.8" H x 5.98" D (143 mm x 21 mm x 152 mm) including connectors and flange
Weight	15 oz
Power	12 volts, 4 watts (100-230 VAC modular power supply)
Temperature Range	0 to 40° C ambient (all specs met)
Relative Humidity	0 to 95%, non-condensing
Altitude	0 to 10,000 ft.

