

Ben-Har™ 1151-FR

Flame Retardant, Flexible Silicone Rubber Coated Sleeveing

Temp Class: Class H (200° C)


Grades Available: A (8,000 V), C (2,500 V)

Material: Silicone Coated Fiberglass

Sizes Available: AWG #24 through 2" I.D.

Colors Available: White, Black, Red Iron Oxide, Natural

Applicable Standards: UL Recognized Component and VW-1 Flame Rating under file no. E63446 (Grade A), NEMA TF-1 Type 5, MIL-I-3190/6 – QPL (Grade A)

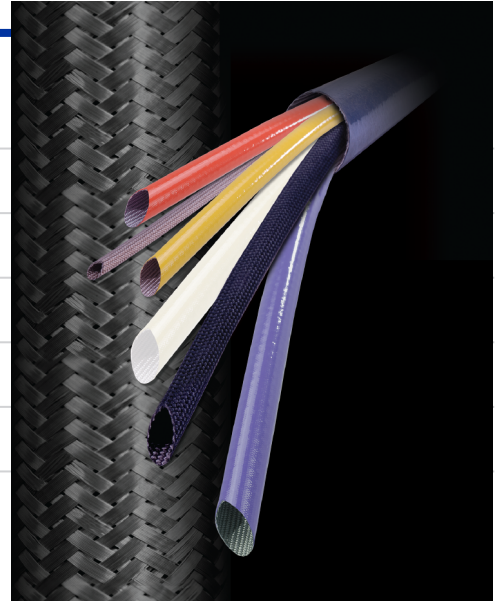

Features

- ▶ Excellent low temperature flexibility with outstanding flame retardant properties.
- ▶ Resistant to acids, alkalis, organic solvents and aliphatic hydrocarbons. Slight swelling may be produced by aromatic solvents and chlorinated hydrocarbons.
- ▶ Compatible with common Class H insulating varnishes.
- ▶ Ketones and esters may cause deterioration.

Product Description

Ben-Har 1151-FR sleeveing is an extremely flexible silicone rubber coated fiberglass sleeveing with outstanding flame retardant properties. The special combination of a smooth fiberglass bore and flexible, elastomeric silicone coating allows this sleeveing to expand and conform over larger dimensions, assuring a snug fit, permanent placement, and elastic self-fitting on components or terminals. The excellent bond of rubber coating to the braid insures against damage from rough assembly handling.

Suggested Applications

Ben-Har 1151-FR is commonly used in appliance assemblies, wire harnesses, transformer leads, power supplies, and motor coil and heater leads. This product is also available in heavy wall constructions (15KV) for high voltage use.

Ben-Har™ 1151-FR

Sizes Available

Size	Inside Diameter, in. (mm)		Nominal I.D.
	Maximum	Minimum	
24 AWG	0.027 (0.69)	0.020 (0.51)	0.022
22 AWG	0.032 (0.81)	0.025 (0.64)	0.027
20 AWG	0.039 (0.99)	0.032 (0.81)	0.034
19 AWG	0.044 (1.11)	0.036 (0.91)	0.040
18 AWG	0.049 (1.25)	0.040 (1.02)	0.042
17 AWG	0.054 (1.37)	0.045 (1.14)	0.047
16 AWG	0.061 (1.55)	0.051 (1.30)	0.053
15 AWG	0.067 (1.70)	0.057 (1.45)	0.059
14 AWG	0.074 (1.88)	0.064 (1.63)	0.066
13 AWG	0.082 (2.08)	0.072 (1.83)	0.076
12 AWG	0.091 (2.31)	0.081 (2.06)	0.085
11 AWG	0.101 (2.60)	0.091 (2.31)	0.095
10 AWG	0.112 (2.80)	0.102 (2.60)	0.106
9 AWG	0.124 (3.20)	0.114 (2.90)	0.118
8 AWG	0.141 (3.60)	0.129 (3.30)	0.133
7 AWG	0.158 (4.00)	0.144 (3.70)	0.148
6 AWG	0.178 (4.50)	0.152 (4.10)	0.166
5 AWG	0.198 (5.00)	0.182 (4.60)	0.186
4 AWG	0.224 (5.70)	0.204 (5.20)	0.208
3 AWG	0.249 (6.30)	0.229 (5.80)	0.234
2 AWG	0.278 (7.10)	0.258 (6.60)	0.263
1 AWG	0.311 (7.90)	0.289 (7.30)	0.294
0 AWG	0.347 (8.80)	0.325 (8.30)	0.330
3/8"	0.399 (10.10)	0.375 (9.50)	0.375
7/16"	0.462 (11.70)	0.438 (11.10)	0.438
1/2"	0.524 (13.30)	0.500 (12.70)	0.500
5/8"	0.655 (16.70)	0.625 (15.90)	0.625
3/4"	0.786 (20.00)	0.750 (19.10)	0.750
7/8"	0.911 (23.20)	0.875 (22.20)	0.875
1"	1.036 (26.30)	1.000 (25.40)	1.000
1-1/8"	1.161 (29.60)	1.125 (28.70)	1.125
1-1/4"	1.286 (32.80)	1.250 (31.90)	1.250
1-1/2"	1.536 (39.20)	1.500 (38.30)	1.500
1-3/4"	1.786 (45.50)	1.750 (44.60)	1.750
2"	2.036 (51.90)	2.000 (51.00)	2.000

*All Atkins & Pearce coated insulation solutions are REACH and RoHS compliant.