



B-498 Repositionable Vinyl Cloth Material

Color: White Finish: Semi-Gloss

Repositionable vinyl cloth material for wire, cable, and component marking. Adhesive and cloth backing offers excellent holding power, while easily being repositioned and removed.

Performance Attributes: 




Figure 31




Figure 37





Figure 30

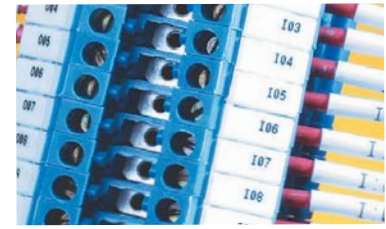

B-498 Material for General Applications

Diagram	Part Number	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Approx. Wire Gauge	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 37	PTL-15-498	B-498	Vinyl	White	1.000 (25.4)	0.275 (7.0)	22 to 16	1	750	R6210
Fig. 37	PTL-7-498	B-498	Vinyl	White	0.500 (12.7)	0.500 (12.7)	22 to 16	1	500	R6210
Fig. 37	PTL-17-498	B-498	Vinyl	White	1.000 (25.4)	0.500 (12.7)	12 to 10	1	500	R6210
Fig. 31	PTL-10-498	B-498	Vinyl	White	0.250 (6.4)	0.750 (19.1)	16 to 10	1	750	R6210
Fig. 31	BM71-11-498	B-498	Vinyl	White	0.500 (12.7)	0.750 (19.1)	16 to 10	1	5000	R6210
Fig. 31	PTL-11-498	B-498	Vinyl	White	0.500 (12.7)	0.750 (19.1)	16 to 10	1	500	R6210
Fig. 31	PTL-16-498	B-498	Vinyl	White	0.375 (9.5)	1.000 (25.4)	12 to 10	1	500	R6210
Fig. 31	BM71-18-498	B-498	Vinyl	White	0.750 (19.1)	1.000 (25.4)	12 to 10	1	2500	R6210
Fig. 31	PTL-18-498	B-498	Vinyl	White	0.750 (19.1)	1.000 (25.4)	12 to 10	1	250	R6210
Fig. 37	BM71-19-498	B-498	Vinyl	White	1.000 (25.4)	1.000 (25.4)	12 to 10	1	2500	R6210
Fig. 37	PTL-19-498	B-498	Vinyl	White	1.000 (25.4)	1.000 (25.4)	12 to 10	1	250	R6210
Fig. 31	PTL-28-498	B-498	Vinyl	White	0.250 (6.4)	1.500 (38.1)	10 to 4	1	750	R6210
Fig. 31	BM71-29-498	B-498	Vinyl	White	0.500 (12.7)	1.500 (38.1)	10 to 4	1	5000	R6210
Fig. 31	PTL-30-498	B-498	Vinyl	White	0.750 (19.1)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 31	PTL-31-498	B-498	Vinyl	White	1.000 (25.4)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 37	PTL-32-498	B-498	Vinyl	White	1.500 (38.1)	1.500 (38.1)	10 to 4	1	250	R6210
Fig. 31	PTL-21-498	B-498	Vinyl	White	1.000 (25.4)	2.500 (63.5)	Cables	1	100	R6210
Fig. 31	PTL-23-498	B-498	Vinyl	White	1.000 (25.4)	4.000 (101.6)	Cables	1	100	R6210
Fig. 31	PTL-33-498	B-498	Vinyl	White	1.500 (38.1)	4.000 (101.6)	Cables	1	100	R6210
Fig. 31	PTL-34-498	B-498	Vinyl	White	1.500 (38.1)	6.000 (152.4)	Cables	1	50	R6210

B-498 Material for Terminal Block Applications

Diagram	Part Number	B-#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Approx. Wire Gauge	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 30	PTLTB-498-240	B-498	Vinyl	White	0.240 (6.1)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	PTLTB-498-318	B-498	Vinyl	White	0.318 (8.1)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	PTLTB-498-375	B-498	Vinyl	White	0.375 (9.5)	30 ft. (9.1 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-240	B-498	Vinyl	White	0.240 (6.1)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-318	B-498	Vinyl	White	0.318 (8.1)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210
Fig. 30	BPTLTB-498-375	B-498	Vinyl	White	0.375 (9.5)	300 ft. (91.4 m)	-	1	1 Roll Cont.	R6210



Did You Know? Bulk Label Rolls

Bulk materials are designed for the TLS 2200 and TLS PC Link thermal labeling systems to save customers money, and provide the perfect low volume* labeling solution.

A reusable dispenser box protects materials from dust and debris and allows easy storage until the next identification job.

Watch for catalog numbers that begin with "B". This indicates materials rolls that are "Bulk" Materials.

* TLS 2200 and TLS PC Link printers are recommended for printing 500 or less labels per print run. Printer slowdown is possible if printing large quantities of labels at one time depending on the material, label size and amount of print coverage.



Approx. wire gauge based on AWG for THHN wire.

TLS2200 Printer Ribbons on page 57.
Full Material Properties on page 227.