

ALL MATERIALS TO BE ROHS COMPLIANT

FOUR TWISTED PAIRS IN FOIL:

ALL CONDUCTORS— 22 AWG (7X30) TINNED COPPER
INSULATION— PVC, 80 C, 300V MINIMUM

COLOR CODE—

TWISTED PAIR— BROWN, WHITE/BROWN

TWISTED PAIR— BLACK, WHITE/BLACK

TWISTED PAIR— ORANGE, WHITE/ORANGE

TWISTED PAIR— RED, WHITE/RED

DRAIN WIRE— 22 AWG (7X30) TINNED COPPER

FILLER — FIBRILLATED POLYPROPYLENE (IF USED)

FOIL TAPE OVER 4 PAIRS AND DRAIN, ALUMINUM IN

OUTER JACKET MATERIAL— PVC GREY


OUTER JACKET THICKNESS— 0.032 NOMINAL/ 0.020 MINIMUM

OVERALL CABLE DIAMETER— 0.280” NOMINAL

SPOOL SIZE— NOT TO EXCEED 10” HEIGHT X 17” DIAMETER

JACKET PRINTING IN WHITE, 0.12” CHARACTER HEIGHT:

AccretechSBS.com CA-8004

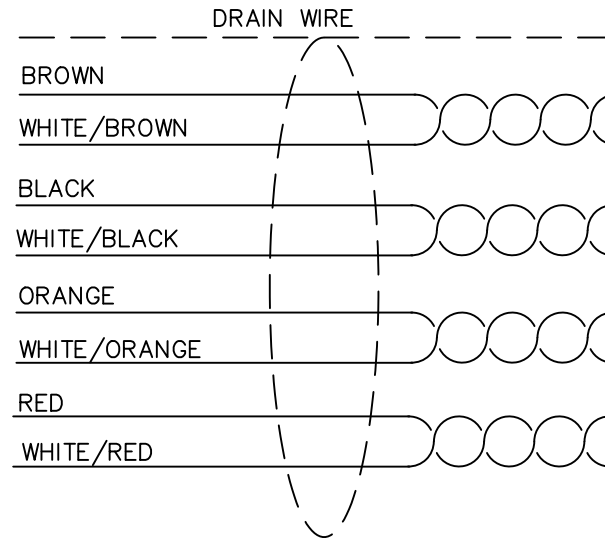

GENERAL DRAWING NOTES: U.O.S.

- BREAK ALL CORNERS 0.030 RADIUS OR CHAMFER
- MACHINE ALL FILLETS 0.030 RADIUS
- ALL DIAMETERS CONCENTRIC -A- .005 TIR
- TURNED SURFACE FINISHES 63 RMS OR BETTER
- DRILLED OR BROACHED DETAILS 125 RMS OR BETTER
- DIM AND TOL SHALL BE HELD AFTER PLATING
- STAMP PART & WORK NUMBERS AS SHOWN
- DO NOT USE DWG. IF MANUFACTURING HOLD IS INITIALED

REVISION HISTORY - (MOST CURRENT REV. AT TOP)

REV.#	DATE	INITIALS	NOTE
3	03-21-22	SPW	TITBLOCK ASBS
2	05-26-21	WWK	JACKET WRITING ACCRETECHSBS.COM
1	04-14-15	RWP	INITIAL DESIGN

TOLERANCES: UNLESS OTHERWISE SPECIFIED

- X.XX = +/- 0.010 [X.XX] = +/- [0.05]
- X.XXX = +/- 0.005 [X.X] = +/- [0.1]
- ANGLES = +/- 1.0 DEG [X] = +/- [0.3]

SCALE: NONE MATERIAL: MANUFACTURED

Do Not Scale Drawing

ACCRETECH SBS INC.

2451 NW 28TH AVE, PORTLAND, OR 97210

TEL: (503) 595-4270 FAX: (503) 595-4271

PART: REMOTE DISPLAY CABLE WIRE

NUMBER: CA-8004

FILE: CA-8004 (R1) REMOTE.DWG

DATE: 04-14-15
DRAWN BY: RWP
MANF. HOLD:

SHEET: HOLD DATE: