

NOTE: USE 1" MANDRELL

	LABELS						
	REF.	INFORMATION	POSITION				
		TCSA100793 REV FA					
	A	MFR LOC S/O	3 IN				
		ASSEMBLED IN COO					
		TCSA100793 REV FA					
	В	MFR LOC S/O	12 IN				
	l	ASSEMBLED IN COO					



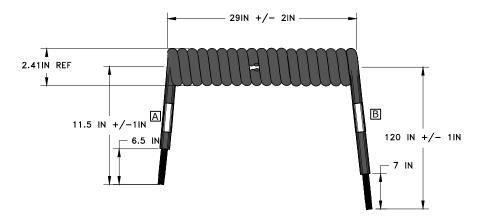

TEMPERATURE: -40C to 105C 600 V

TELEDYNE CABLE SOLUTIONS
STORM CABLE • VARISYSTEMS

Manufactured IAW IPC/WHMA-A-620
ASSEMBLY TESTED FOR HIPPOT, CONTINUITY AND SHORTS.
ALL DIMENSIONS ARE IMPERIAL, UNLESS OTHERWISE SPECIFIED
THE INFORMATION CONTAINED IN THIS DAMWING 5 THE SOLO PROPERTY OF FELEDYNE WARTSYSTEMS INC. ANY THE WATEN PERMISSION OF TELEDYNE WARTSYSTEMS INC. IS PROMISTED. ANY MODIFICATION, REVISION FOR THE CONTAINED ANY DOTAIN OF THE CONTAINED AND THE CONTAINED AND

3	DRAWING NO.	TCSA100793				
3	CUSTOMER P/N					
)	CUSTOMER	INDUSTRIAL ELECTRIC WIRE AND CABLE				
D.	DESCRIPTION	14 GA 7 CONDUCTORS COILED CORD				
		HYTREL JACKET -40+105C				

| DRN BY | DRN DATE | CHK BY | CHK DATE | VER BY | VER DATE | IS | 11/28/16 | SIZE | REV | FA2 | SHEET | NO. 1 OF 1

2	2	THT-81-427-1	LABEL 1in.W X 6in.L, CABLE OD 0.477in1.67in.		İ	
1	41.5 FT	TCSC100570		14 GA*7C*HYTREL*JACKET*BLACK	XXXX	ı
ITEM	OTY.	PART NUMBER	REF. PART #	DESCRIPTION	ECN NO	ĺ

XXX
N NO DESCRIPTION REQUEN DATE