




## PRODUCT SPECIFICATION

Controlled Document - Engineering Drive

**CATALOG NUMBERS:** See table below  
**DESCRIPTION:** Polar/Solar coil cords  
**APPROVALS:** UL Listed and CSA Certified

### CONSTRUCTION PARAMETERS:

Cable type: See table below  
 Conductors: Bare copper, see table for gauge and stranding  
 Jacket material: TPE, black  
 Overall cable O.D. (nom): See table below

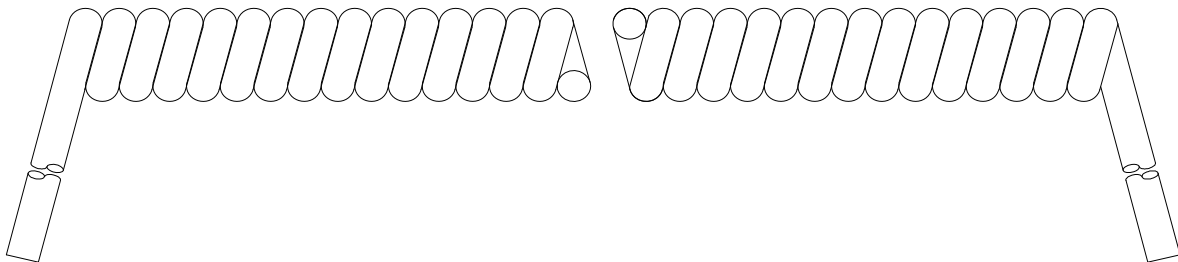

Coil length range: 4 ft. to 20 ft.  
 Length of "tails": 1 ft. (nom)  
 Coil O.D. (nom): See table below

Catalog no.	Cable type	Gauge	Stranding	Cable O.D.	Coil O.D.
09809	SJEOW	18/2	16/30	0.312	1.08
09810		18/3		0.310	1.12
09811		18/4		0.350	1.16
09812		16/2	26/30	0.315	1.13
09813		16/3		0.365	1.24
09814		16/4		0.397	1.25
09815	SEOW	14/3	41/30	0.525	2.25
09816	SEOOW	12/3	65/30	0.592	2.39

### ELECTRICAL PROPERTIES:

Cable temperature rating: -50 to +90 deg C  
 Electrical ratings: 300 V (SJEOW), 600 V (SEOW & SEOOW)

*This product complies with European Directive 2011/65/EU (RoHS-2)*

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.