


# COPPERFIELD® UL STYLE 3173/3195/3196/3237 & UL SIS

CSA AWM I A/B & CL 1251 (XLPE)

- CONDUCTORS:** • 22 AWG - 2 AWG Stranded Tinned Copper per ASTM B-33
- INSULATION:** • Color-Coded Cross-Linked Polyethylene (XLPE)
- TEMPERATURE RANGE/  
VOLTAGE RATING:** • UL 3173/3195/3196/3237: 125°C/600V  
• CSA CL 1251: 125°C/600V  
• CSA AWM I A/B: 125°C/600V
- FLAME COMPLIANCES:** • CSA FT-2
- INDUSTRY APPROVALS:** • UL Standard 758 - Styles 3173/3195/3196/3237  
• UL SIS  
• CSA AWM I A/B, CL 1251
- STANDARD COLORS:** • Black • Orange • Blue • Violet  
• White • Yellow • Brown • Green/Yellow  
• Red • Green • Gray
- OPTIONS:** • Stripes available upon request (minimums may apply)  
• Other copper constructions available upon request (minimums may apply)

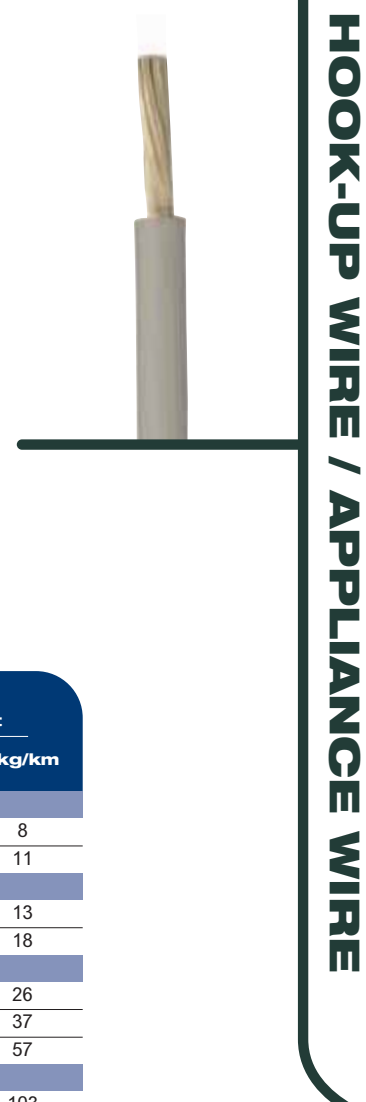

Part Number	Gauge	Stranding	Nominal Wall		Nominal OD		Weight	
			in.	mm.	in.	mm.	lbs./mft	kg/km
<b>UL Styles 3173</b>								
F22030	22	7/.0096	0.030	0.76	0.090	2.29	5.4	8
F20046	20	10/30	0.030	0.76	0.103	2.62	7.5	11
<b>UL Styles 3173/3237</b>								
F18082	18	16/30	0.030	0.76	0.108	2.74	8.8	13
F16047	16	26/30	0.030	0.76	0.119	3.02	12.0	18
<b>UL Styles 3173/3237 &amp; SIS</b>								
F14047	14	41/30	0.030	0.76	0.136	3.45	17.3	26
F12032	12	65/30	0.030	0.76	0.155	3.94	25.1	37
F10018	10	105/30	0.030	0.76	0.187	4.75	38.5	57
<b>UL Styles 3195/3237 &amp; SIS</b>								
F08050	8	133/29	0.045	1.14	0.261	6.63	69.2	103
<b>UL Styles 3196/3237 &amp; SIS</b>								
F06078	6	133/27	0.060	1.52	0.338	8.59	115.0	171
F04029	4	133/25	0.060	1.52	0.380	9.65	173.0	257
<b>UL Styles 3196</b>								
F02097	2	665/30	0.060	1.52	0.471	11.96	267.0	397
F02058	2	133/23	0.060	1.52	0.471	11.96	266.0	396
F02041	2	259/26	0.060	1.52	0.471	11.96	256.0	381

Dimensions and weights are nominal and are subject to industry tolerances unless otherwise noted.

See page 127 for Ordering and Color Code information.



**Coleman Cable Inc.**  
800.323.9355 • www.colemancable.com