


PURCHASING REQUIREMENTS:

1. SUPPLY (FEEDER) CORD TO BE cULus LISTED (ELBZ/ELBZ7) WITH NEMA 5-15P (PLUG) MOLDED ON 14AWG TYPE SJ, SJT, SJE OR HARDER CORD (AS NOTED BELOW).
2. INDIVIDUAL WIRES DO NOT NEED TO BE STRIPPED.

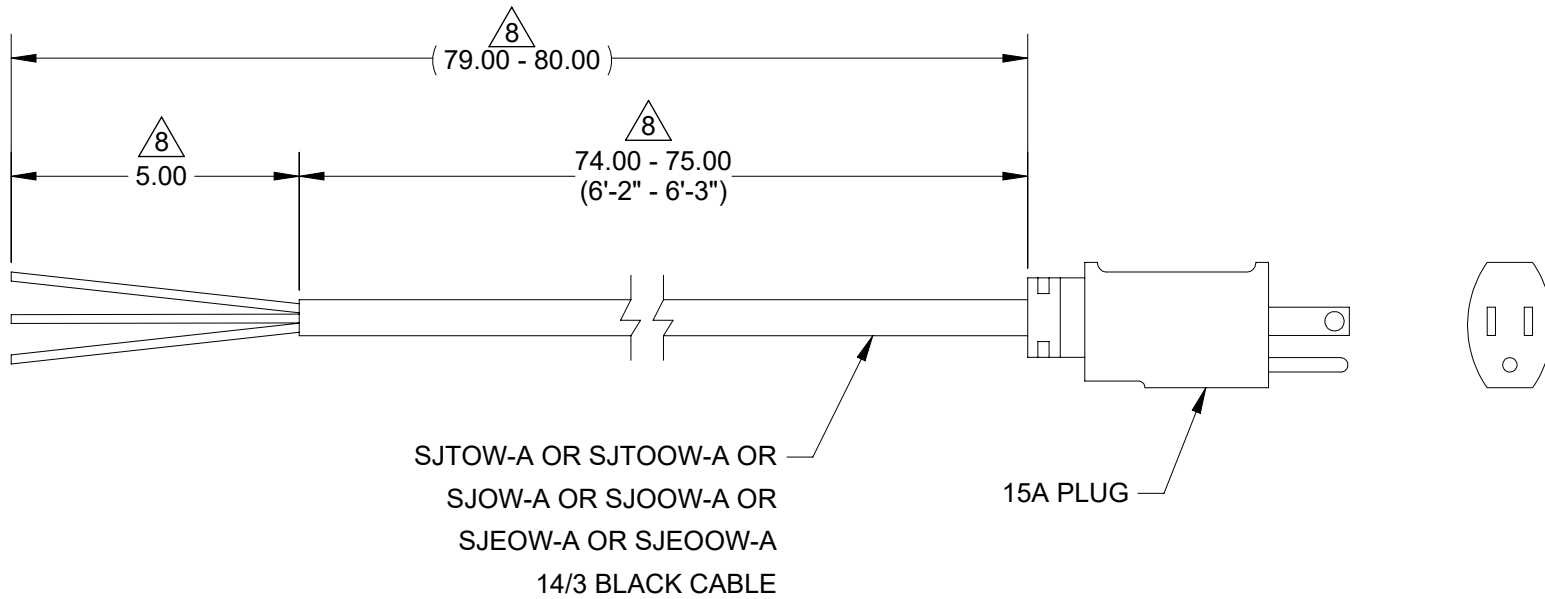

STATUS: RELEASED		DESCRIPTION: FEEDER CORD 14/3 125V 15A PLUG BK	
ER NO:	ECO-48994	UNLESS OTHERWISE SPECIFIED INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5	
ER DATE:	09/20/2022	PRIMARY UNITS ARE IN INCH POUND SECONDS SECONDARY UNITS IN MILLIMETERS KILOGRAMS SECONDS TOLERANCES ARE AS FOLLOWS	
ER ENGR:	K COCHRAN	DECIMAL =	MINIMUM MACHINED SURFACE 250
ER APPR:	D SAMPSON	XX ± 0.1 IN [2.5 MM]	
DRAWN:	K COCHRAN 10/25/2021	X.XX ± 0.03 IN [0.8 MM]	
APPR:	J GOODALE 10/25/2021	X.XXX ± 0.010 [0.25 MM]	THREAD CLASS: 2 ALL DIMENSIONS GREATER THAN 24.00 INCHES HAVE A TOLERANCE OF ± .063 IN UNLESS OTHERWISE SPECIFIED
		PROPRIETARY AND CONFIDENTIAL This drawing and the information shown constitute trade secret and confidential property of Conductix, Inc. It is subject to recall, and is loaned for use only in connection with the authorized manufacture or installation of Conductix, Inc. products, and on the condition that it will be treated as confidential and will not be disclosed, published or reproduced in whole or in part, or permitted to be viewed or used by any other party, without specific written permission. Receipt and use of the drawing and information constitutes acceptance and agreement to the above.	
		10102 F Street Omaha, NE 68127 800-521-4888	
		MATERIAL NO. 2:	XA-41042 REV 8
SIZE A	SCALE: 1:8	WEIGHT(REF): 0.50 LB MAT'L: Rubber	SHEET 1 of 1