

REVISIONS



BILL OF MATERIALS

REV	DESCRIPTION	DATE	DRAWN	APPROVED
A	ITEM 3 WAS IEC320	08/31/01	C. PRUITT	H. MAYER
B	PLACED DWG ON NEW TEMPLATE; ITEM 1--ADD MALE GROUNDING, INCORPORATED NOTE 6; ITEM 2--ADD BC STRANDING, W/DRAIN WIRE; ITEM 3--ADD PHOS. BRASS CONTACTS, GEM 98741; ADD G,N,L TO PLUG & CONNECTOR FACE; NOTES 2,3,4,5 INCORPORATED INTO NOTES 2&3, ADD LOGOS; NOTE 7 WAS PUT UP; SEE DETAIL; MOVE QTY & WGT TO HANK DETAIL; OVERALL DIM WAS 2.0M±25.4mm.	08/03/04	C. PRUITT	N. WALDRON
C	ADDED RoHS NOTE.	11/14/05	A. RICE	L. ODEN
D	CORRECTED CSA FILE NO FROM LR77840.	03/30/06	A. RICE	L. ODEN
E	ADDED PLUG MARK NOTE.	04/26/06	A. RICE	L. ODEN
F	ADDED APPROVALS NOTE; REMOVED UL/CUL LABEL P/N, PLUG RATING MARK NOTES.	10/30/07	R. LIU	L. ODEN

ITEM	DESCRIPTION	QTY.	PART NO.	VENDOR	REV.
1	BLACK MALE GROUNDING PLUG (NEMA 5-15P) NICKEL PLATED BRASS BLADES	1	UC-004 98661	UNICABLE GEM	
2	BLACK SJT 14/3 60°C FOIL SHIELDED W/DRAIN WIRE CEE BC STRANDING (41X30)	*	N/A	N/A	
3	BLACK FEMALE CONNECTOR (IEC 60320/C13) PHOS. BRONZE CONTACTS	1	UC-005 98741	UNICABLE GEM	

NOTES:

1. ELECTRICAL RATING: 15A/125V.
2. APPROVALS: U/CUL/CSA
3. UL/CUL FILE NO. E147323, MEETS STANDARD UL 817.
4. CSA FILE NO. LL77839, MEETS STANDARD CSA C22.2, NO. 21.
5. RoHS COMPLIANT.

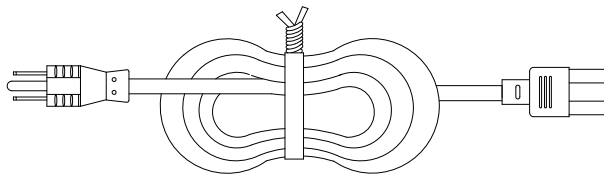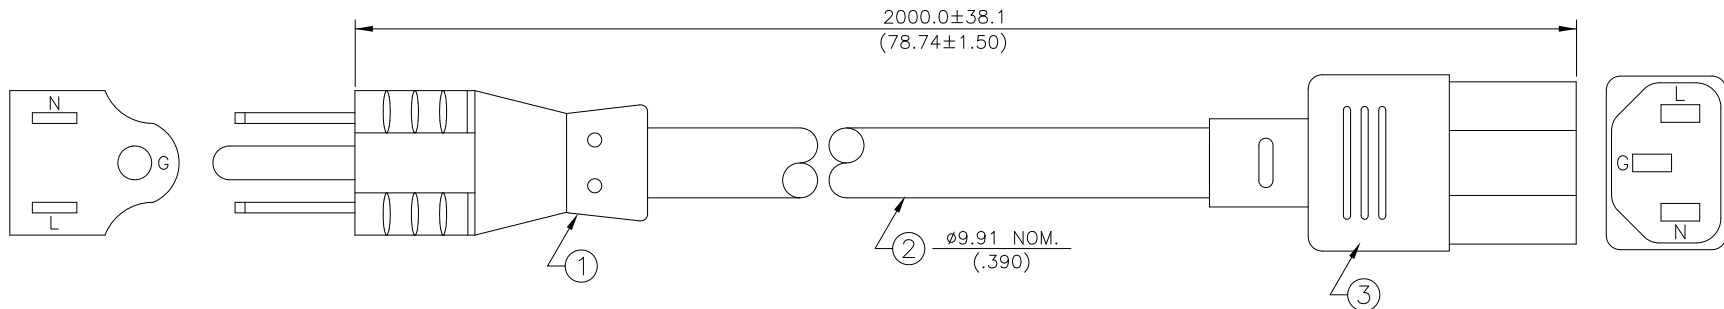

50 PER CTN/38 LBS.  
STANDARD HANK AND TIE DETAIL

THIS DRAWING AND INFORMATION THEREIN ARE PROPRIETARY TO UNICABLE INC. AND SHALL NOT BE USED WITHOUT UNICABLE'S CONSENT.

DRAWN: T. MILLER	DATE 04/09/98
CHECKED: R. LIU	DATE 10/30/07
APPROVAL: L. ODEN	DATE 10/30/07

UNICABLE, INC.  
STOCK POWER CORD

CAD REF FILE:	6450-02M-BB	REV.
CUST. PART NO.	6450-02M-BB	REV.
CUST. DWG. NO.	N/A	REV.
DRAWING NO.	6450-02M-BB	F



UNICABLE INC