


CONFIDENTIAL

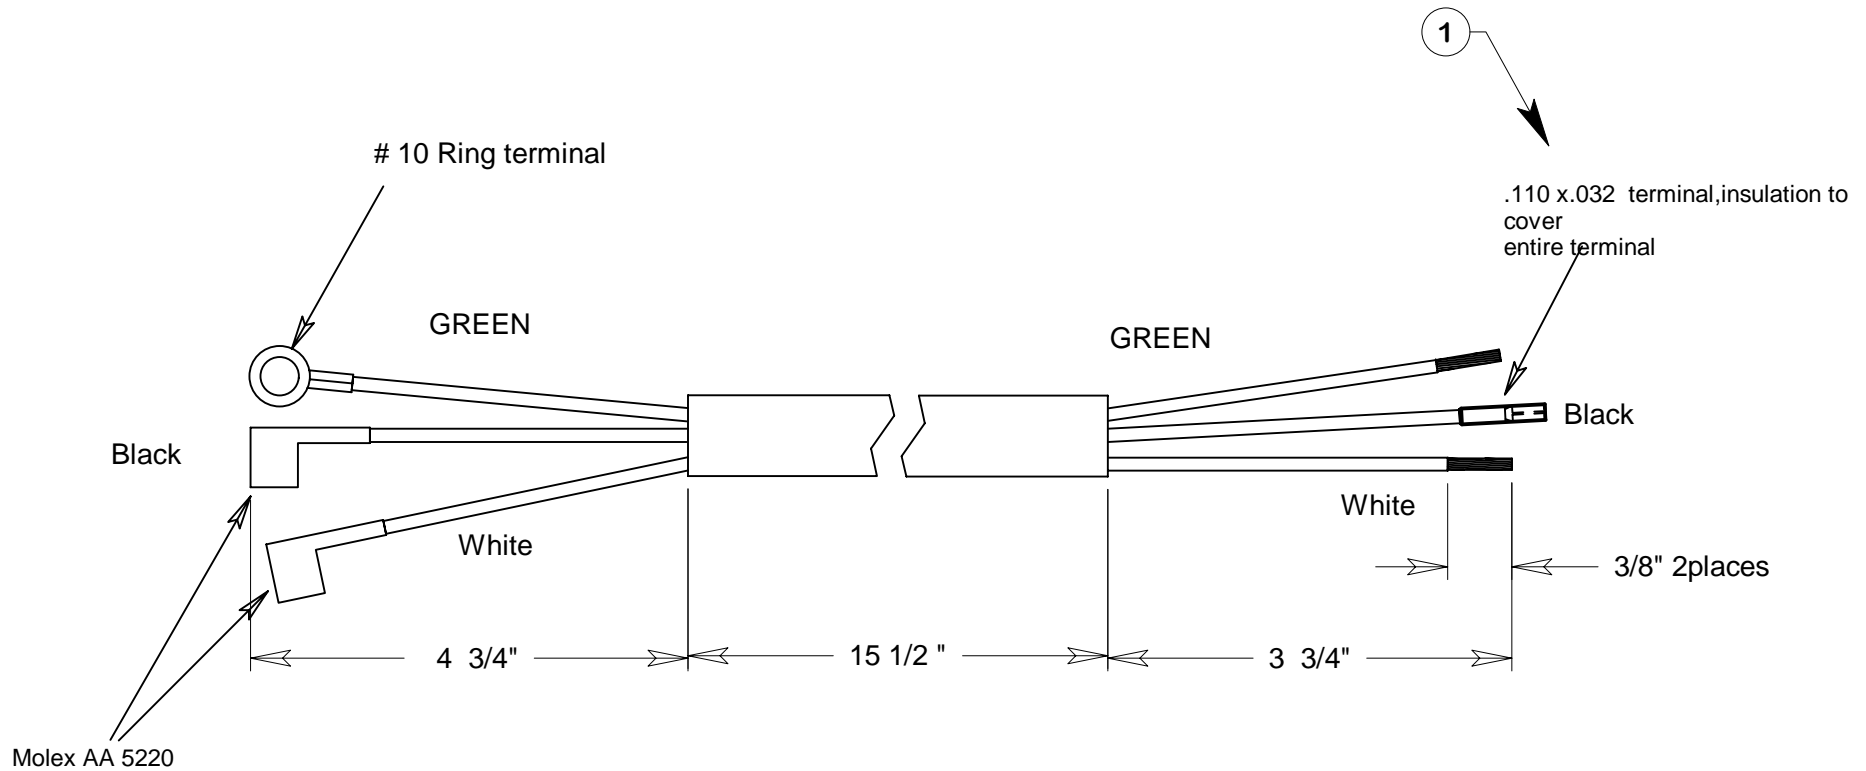

NOTES: UNLESS SPECIFIED
Material: 18/3 60°C Black

1) All wire to be #18 AWG Stranded Tin Copper with PVC insulation rated 600V and meeting UL 1015 and CSA TEW-105.

2) Terminal crimps must be of type to satisfy TUV requirements.

| APPROVAL | Name | Date |
|----------|-------------------------|------|
| ENG | DOCUMENT CONTROL | |
| MFG | | |
| Q.A. | | |

Obsoletes drw'g # 30564

| | | | |
|--|-------|---------------|---------------|
| SHEET 1 OF 2 | | PRINT CHK BY | |
| DAREX CORPORATION | | | Revision |
| 220 HERSEY -P.O.BOX 277 ASHLAND,OR. 97520 Telephone # 503-488-2224 Fax # 503-488-2229 | | | 2 |
| TITLE #2 E-90 Wire harness (115 volt) | | PART # | PP08653EF |
| SCALE none | BY KM | DATE 11/08/95 | DWG. # E08653 |

CONFIDENTIAL

SHEET 2 OF 2

PART # PP08653EF

REVISION NOTES

| APPROVAL | Name | Date |
|----------|------|------|
| ENG | | |
| MFG | | |
| Q.A. | | |

DOCUMENT CONTROL

REASON FOR CHANGE

DATE

RME

DESIGN

(1) Added x.032 to .110 also Changed Amp2-520128-2 now Molex AA 5220
(2) Added Notes.

04/20/98 FDG
08/16/00 RJ