

4

3

2

1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LIEBEL-FLARSHEIM, CINCINNATI, OHIO, AND IS SUBJECT TO BEING RETURNED UPON REQUEST. IT SHALL NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF LIEBEL-FLARSHEIM. ANY AUTHORIZED REPRODUCTION MUST BEAR THIS ENTIRE LEGEND.

LTR	REVISIONS	ECN	DATE	BY
A	DRAWING RELEASE	15566	9-18-01	GSW
B	CHANGE PTFE WRAP TO MYLAR WRAP	29465	10/04/17	HH

Four 3 x 26 AWG, 60% Braid w/26 AWG Drain & Mylar Wrap (B)  
 Cable #1 - BLU, GRN, YEL  
 Cable #2 - WHT/BLU, WHT/GRN, WHY/YEL  
 Cable #3 - BLK/BLU, BLK/GRN, BLK/YEL  
 Cable #4 - RED/BLU, RED/GRN, RED/YEL


15 x 26 AWG, 60% TC Braid w/26 AWG Drain, Mylar Wrap, see Color Chart (B)

ALL 45 Conductors to be 19x38TC Stranding, with 8 mil Ref. Polypropylene Insulation

12 x 26 AWG, 60% TC Braid w/26 AWG Drain, Mylar Wrap, see Color Chart (B)

90% TC Braid shield w/26 AWG Drain, Overall Clear Mylar Wrap, Poly Fillers, 35 mil Ref. Light Gray PVC Jacket with Indented Printing, 80° 300V, UL & CSA Approved, .570 O.D. Ref.

6 x 26 AWG, 60% TC Braid w/26 AWG Drain, Mylar Wrap, see Color Chart (B)

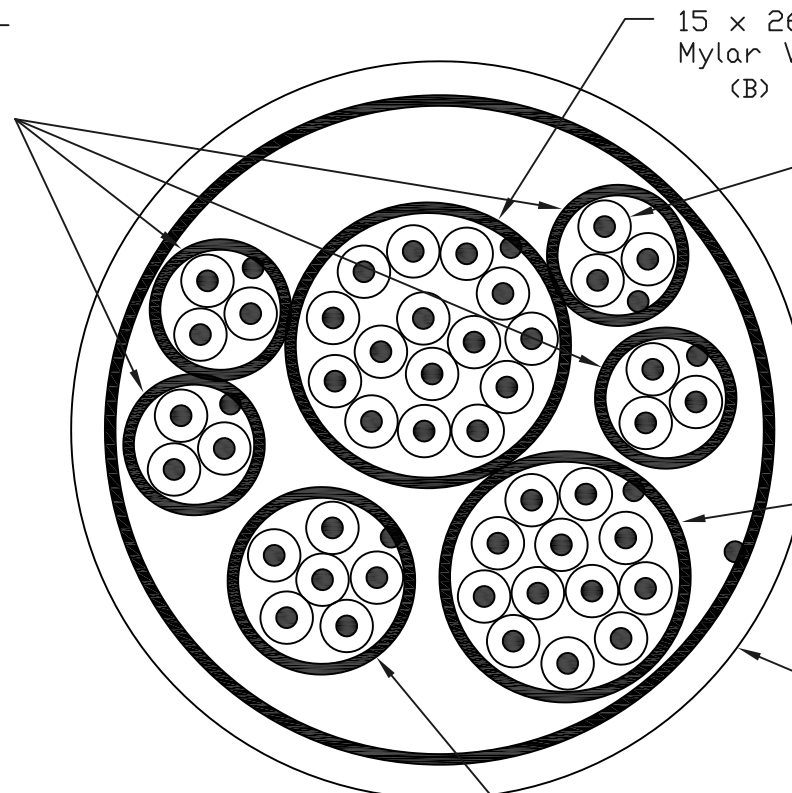

COLOR CHART

- 1. BLACK
- 2. RED
- 3. WHITE
- 4. GREEN
- 5. ORANGE
- 6. BLUE
- 7. BROWN
- 8. YELLOW
- 9. PURPLE
- 10. SLATE
- 11. PINK
- 12. TAN
- 13. RED/GREEN
- 14. RED/YELLOW
- 15. RED/BLACK

Note:

1. The layout of the internal cables within the jacket is not specified.

APPROVED SOURCE:  
INDUSTRIAL ELECTRIC

		MATERIAL	BREAK ALL EDGES		TITLE	
		N/A	TOLERANCE UNLESS OTHERWISE SPECIFIED		CABLE, OPTISTAR POWERHEAD	
		FINISH	2 PLACE DECIMAL	± .015	PRODUCT	OPTISTAR MR
		N/A	3 PLACE DECIMAL	± .005	CHK	T. SPICER 9-19-01
		Liebel-Flarsheim <b>LF</b>	ANGLE	± 1/2°	APPD	G. WAGNER 9-19-01
		802303	SCALE	NONE	DRAWING/PART NO.	
		34 FT.	DRAWN BY		256751	
WHERE USED	QTY	2111 EAST GALBRAITH ROAD CINCINNATI, OHIO 45237-1640 USA		G. WAGNER 5-10-01		REV. B

4

3

2

1